

(19) World Intellectual Property
Organization
International Bureau



526,034
28 FEB 2005



(43) International Publication Date
11 March 2004 (11.03.2004)

PCT

(10) International Publication Number
WO 2004/021305 A2

- (51) International Patent Classification⁷: G08G 1/0968 (74) Agent: HILL, Justin, John; McDermott, Will & Emery, 7 Bishopsgate, London EC2N 3AR (GB).
- (21) International Application Number: PCT/GB2003/003702 (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: 27 August 2003 (27.08.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
0220062.4 29 August 2002 (29.08.2002) GB
0308188.2 9 April 2003 (09.04.2003) GB
- (71) Applicant (*for all designated States except US*): ITIS HOLDINGS PLC [GB/GB]; The Warrent House, 1 High Street, Altrincham, Cheshire WA14 1PZ (GB).
- (72) Inventors; and
- (75) Inventors/Applicants (*for US only*): BURR, Jonathan, Charles [GB/GB]; 15 Leicester Road, Hale, Altrincham, Cheshire WA15 9QA (GB). GATES, Gary [GB/GB]; 12 Dale Gardens, Heswall, Wirral CH60 6TQ (GB). SLATER, Alan, George [GB/GB]; 6 Oklands, Hillside, Heaton, Bolton BL1 5DZ (GB).
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— without international search report and to be republished upon receipt of that report —
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: APPARATUS AND METHOD FOR PROVIDING TRAFFIC INFORMATION

(57) Abstract: A system and method for providing traffic information is disclosed. In one embodiment, a method comprises, for each segment of a route between an origin point and a destination point, performing a time-dependent journey planning calculation, based on a time during which a vehicle is predicted to be travelling through the segment, to produce a segment result; forming at least one route result, the at least one route result being formed based on a plurality of the segment results; storing the at least one route result in a digital storage means; and accessing the rapid access means for use in responding to a user request for traffic information for a journey between the origin point and the destination point. In another embodiment, a method comprises pre-determining at least a portion of a recommended most economic route between an origin point and a destination point; storing the pre-determined portion of the recommended most economic route in a rapid access means in a digital storage means; and accessing the rapid access means for use in responding to a user request for traffic information for a journey between the origin point and the destination point. In another embodiment, a method comprises determining, with reference to a first network of geographical boundaries and a second network of digital map nodes, a recommended most economic route between an origin point and a destination point; and transmitting the recommended most economic route to a user.

WO 2004/021305 A2

APPARATUS AND METHOD FOR PROVIDING TRAFFIC INFORMATION

TECHNICAL FIELD

5 This invention relates to systems and methods for providing traffic information, and in particular to systems and methods for responding to user requests regarding the most economic route between an origin point and a destination point.

BACKGROUND

10 Traffic and travel information is significant in calculating journey times, and avoiding congestion that delays individual route completion. There are a number of ways of obtaining traffic information and calculating travel time.

In the simplest form travel time is calculated mathematically by dividing the distance to be travelled (either estimated or taken from a map) by the average travel
15 speed (either estimated or taken from an analysis of tachograph data in the case of heavy goods vehicles). Journey time and estimated time of arrival are not particularly accurate, and there is no real consideration of potential traffic congestion of either a long-term nature (for example, road works) or a short-term nature (for example, traffic accidents).

20 Commercial operations require a greater degree of accuracy to forecast travel times, particularly when using vehicle routing and scheduling techniques to plan vehicle journeys. As a result, traffic planners may use estimated speeds for different types of vehicles over different types of roads (for example, motorways, urban dual carriageways or road surge carriageway arterial roads). Computer based maps with
25 algorithms which determine the shortest path between two points subsequently divides the route into road lengths by type of road and applies estimated speeds to obtain a journey time. Further developments of this technique have, where traffic congestion is known to occur, applied congestion parameters in the form of percentage achievement of the estimated journey time between specific times of the
30 day for particular types of road (for example, urban motorways between 07.30 am and 10.00 am should be 60% of the estimated journey time). However, commercial operators who undertake comparisons of "planned" and "actual" journey times from the tachograph analysis still show significant differences, which are retrospectively found to be caused by traffic congestion.

Traffic congestion at the same location and same time, which is repeated either on consecutive days of the week or the same day of the week, is by its nature forecastable and can be accounted for in traffic planning. However, forecasting based on such repeated congestion does not take account of unpredictable congestion, and thus does not accurately relate the speed of a vehicle to an actual road length at a specific time of day.

Real time traffic information is also required by both drivers and commercial vehicle operators in order to avoid delays caused by unforecastable events such as traffic accidents. There are a number of different ways in which real time traffic information is obtained. The most reliable real time traffic information system is the "incident spotter," which may be a designated traffic incident reporter (for example, an Automobile Association traffic reporter on a motorbike) reporting traffic congestion to a central control, or a member of the general public (a driver located in traffic congestion) reporting incidents to a radio station by mobile telephone. Local radio stations may consolidate local traffic data from incident spotters, taxi firms, bus companies and the general public to enable them to broadcast real-time traffic information. Such information is normally vetted by means of many reports on the same incident then disseminated to the public by such means as traffic reports on the radio or by means of traffic information reports by cellular telephones. Such a system only reports incidents as they occur and the information is limited to the immediate vicinity of the incident. In addition the radio reports often continue to be broadcast long after the incident is cleared and traffic is proceeding normally because there is often no real verification process after the initial reports. Users may, based upon the information given, make their own informed choice to divert to an alternative route even when it may not be necessary to do so.

More accurate real-time systems use detectors, which are either sensors on road and bridges or cameras alongside the road that are linked to a local traffic reporting (or control) facility, thereby allowing the dissemination of real-time traffic information. Such detectors are normally located at potential traffic congestion points in order that early warning may be issued by the traffic control authority. Such information is often validated by the police or "incident spotters" and passed on to radio stations or organizations providing traffic information by means of cellular telephones. These systems tend to be geographically limited and again, information on an incident may be communicated well after it is cleared and traffic proceeding

normally – unless there is a verification procedure which up-dates the situation on a regular basis.

Vehicles fitted with radio data systems with traffic messaging channels (RDS – TMC systems) may also obtain local messaging and be able to process alternative routes through the vehicle navigation system, but this generally only occurs when the original route is either “closed” or “severely delayed”.

The most accurate traffic information system currently available is the individual vehicle tracking and tracing system, which uses a vehicle fitted with a global positioning system (GPS) probe to detect the vehicle location. The vehicle’s speed is determined based upon a number of location readings over time. In addition, the vehicle probe has a memory device which records time, data, location and speed at specific time intervals. The collection of such information, either in real-time using a cellular mobile telephone system (GSM) or GPRS, or after the event by radio data download, is known as the “floating vehicle data” (FVD TM) technique. This data is both specific and customized to particular vehicles (operated by those requiring the traffic data), and timely insofar as the data can be collected either in real-time or historically. The extensive data may be analysed by type of vehicle, location (road length), time of day and day of the week. The greatest drawback with FVD TM that is data only, is that it does not give the reason for any traffic congestion encountered. Such information is instead often available from other conventional sources in the public domain.

SUMMARY

According to one aspect of the present invention, there is provided a method for providing traffic information.

In one embodiment according to the invention a method comprises, for each segment of a route between an origin point and a destination point, performing a time-dependent journey planning calculation, based on a time during which a vehicle is predicted to be travelling through the segment, to produce a segment result; forming at least one route result, the at least one route result being formed based on a plurality of the segment results; storing the at least one route result in a digital storage means; and accessing the rapid access means for use in responding to a user request for traffic information for a journey between the origin point and the destination point. Performing the time-dependent journey planning calculation for each segment may

comprise determining a segment duration for traversing the segment based on a predicted vehicle speed for the segment at the time during which the vehicle is predicted to be travelling through the segment; or determining a predicted vehicle speed for traversing the segment based on the time during which the vehicle is predicted to be travelling through the segment. Forming the at least one route result may comprise summing a plurality of segment durations to produce an overall route duration; or averaging a plurality of predicted vehicle speeds, each corresponding to a segment, to produce an overall predicted route speed. Performing the time-dependent journey planning calculation may be based on a time of day and a day of the week during which the vehicle is predicted to be travelling through the segment; and the day of the week may be selected from a group comprising Bank Holiday, Day before Bank Holiday, Day after Bank Holiday, Sunday, Monday, Tuesday, Wednesday, Thursday, Friday, and Saturday.

In another embodiment according to the invention, a method comprises pre-determining at least a portion of a recommended most economic route between an origin point and a destination point; storing the pre-determined portion of the recommended most economic route in a rapid access means in a digital storage means; and accessing the rapid access means for use in responding to a user request for traffic information for a journey between the origin point and the destination point. The pre-determined portion of the recommended most economic route may comprise a route between a first network decision node, for the origin point, and a second network decision node, for the destination point; and the first and second network decision nodes may be nodes, of a network of digital map nodes, that correspond to key transportation links. The rapid access means may comprise a look-up table. Pre-determining at least a portion of the most economic route may comprise determining a shortest time route and/or a shortest distance router between the origin point and the destination point.

In a further related embodiment, the method comprises receiving real time data relating to real time vehicle location from a plurality of vehicle-bound probes; and creating a matrix of vehicle speeds relative to at least a plurality of time of day divisions and a plurality of routes, based on the real time vehicle location data. The plurality of vehicle-bound probes may include at least one mobile telephone. The method may further comprise creating a first matrix of recommended most economic routes relative to at least a plurality of time of day divisions and a plurality of routes,

based on the matrix of vehicle speeds. In creating the first matrix of recommended most economic routes, outlier vehicle speeds, and vehicle speeds related to unforecastable events, may be removed from the matrix of vehicle speeds using statistical analysis. The first matrix of recommended most economic routes may

5 comprise a plurality of route matrix elements, each route matrix element corresponding to a pairing of an origin point with a destination point, and comprising: a route string, a shortest distance corresponding to the route string, a time corresponding to the route string, and a cost corresponding to the route string. The route matrix elements may further comprise entries for a plurality of possible vehicle

10 types. Each shortest distance string may be determined by: determining a first distance between the origin point and the first local decision node; determining a second distance between the first local decision node and the first network decision node; determining a third distance between the first network decision node and the second network decision node; determining a fourth distance between the second

15 network decision node and the second local decision node; determining a fifth distance between the second local decision node and the destination node; and summing the first distance, the second distance, the third distance, the fourth distance, and the fifth distance to produce the shortest distance string. Determining the third distance may comprise summing a plurality of distances corresponding to distances

20 between successive members of the set of network decision nodes, wherein the set of network decision nodes comprises further network decision nodes in addition to the first and second network decision nodes.

In a further related embodiment, the method may comprise identifying, in real time, an area of traffic congestion between the origin point and the destination point;

25 and determining an alternative, second matrix of recommended most economic routes based on the identified area of traffic congestion. The area of traffic congestion may be identified using both public domain data and non-public domain data, or a database of traffic patterns; or by determining whether real time vehicle location data from a plurality of vehicle-bound probes correspond to a pre-determined level of variance

30 from historic real time vehicle speeds. The method may further comprise transmitting a message to a user identifying a cause of the area of traffic congestion.

In a further related embodiment, the second recommended most economic route matrix is determined by determining a route having a shortest time between at least one pairing of origin point and destination point. The method may further

comprise calculating a forecast delay by comparing the shortest time on the second recommended most economic route matrix with a corresponding time from the first recommended most economic route matrix.

5 In a further related embodiment, the method comprises transmitting traffic alert information to a user in real time, the transmission comprising at least one of: a traffic messaging channel on a radio data system; a message to a mobile telephone; or a display of data over the Internet.

10 In another embodiment according to the invention, a method comprises determining, with reference to a first network of geographical boundaries and a second network of digital map nodes, a recommended most economic route between an origin point and a destination point; and transmitting the recommended most economic route to a user. The recommended most economic route may be further determined by determining: a set of local decision nodes comprising a first local decision node, for the origin point, and a second local decision node, for the
15 destination point; and a set of network decision nodes comprising a first network decision node, for the origin point, and a second network decision node, for the destination point; wherein the set of local decision nodes corresponds to links on the second network, and the set of network decision nodes corresponds to key transportation links on the second network; and wherein the origin point and
20 destination point are specified with reference to geographical boundaries on the first network. The geographical boundaries may comprise a set of postcodes. The recommended most economic route may minimise a journey distance, time, or cost between the origin point and the destination point. The set of network decision nodes may comprise further network decision nodes in addition to the first and second
25 network decision nodes. At least one of the origin point, the destination point, and a member of the set of local decision nodes may also be a member of the set of network decision nodes.

30 According to another aspect of the present invention, there is provided a computer program product comprising program code means adapted to control the methods of any of the preceding embodiments.

According to another aspect of the present invention, there is provided a system for providing traffic information.

In one embodiment according to the invention, a system comprises a route segment processor for performing, for each segment of a route between an origin

point and a destination point, a time-dependent journey planning calculation, based on a time during which a vehicle is predicted to be travelling through the segment, to produce a segment result; a route result formation means for forming at least one route result, the at least one route result being formed based on a plurality of the segment results; a rapid access means, in a digital storage means, for storing the at least one route result; and a user request processor for accessing the rapid access means for use in responding to a user request for traffic information for a journey between the origin point and the destination point. The route segment processor may comprise means for determining a segment duration for traversing each segment, based on a predicted vehicle speed for the segment at the time during which the vehicle is predicted to be travelling through the segment; or means for determining a predicted vehicle speed for traversing the segment based on the time during which the vehicle is predicted to be travelling through the segment. The route result formation means may comprise means for summing a plurality of segment durations to produce an overall route duration; or means for averaging a plurality of predicted vehicle speeds, each corresponding to a segment, to produce an overall predicted route speed. The route segment processor may comprise means for performing the time-dependent journey planning calculation based on a time of day and a day of the week during which the vehicle is predicted to be travelling through the segment. The day of the week may be selected from a group comprising Bank Holiday, Day before Bank Holiday, Day after Bank Holiday, Sunday, Monday, Tuesday, Wednesday, Thursday, Friday, and Saturday.

In another embodiment according to the invention, a system comprises a route pre-determination processor for pre-determining at least a portion of a recommended most economic route between an origin point and a destination point; a rapid access means in a digital storage means, for storing the pre-determined portion of the recommended most economic route; and a user request processor for accessing the rapid access means for use in responding to a user request for traffic information for a journey between the origin point and the destination point. The pre-determined portion of the recommended most economic route may comprise a route between a first network decision node, for the origin point, and a second network decision node, for the destination point; and the first and second network decision nodes may be nodes, of a network of digital map nodes, that correspond to key transportation links. The rapid access means may comprise a look-up table. The route pre-determination

processor may comprise means for determining a shortest time route or a shortest distance route between the origin point and the destination point.

In a further related embodiment, the system comprises a real time data receiver for receiving real time data relating to real time vehicle location from a plurality of vehicle-bound probes; and a matrix, in a digital storage means, relating vehicle speeds to at least a plurality of time of day divisions and a plurality of routes, based on the real time vehicle location data. The plurality of vehicle-bound probes may include at least one mobile telephone. The system may further comprise a first matrix of recommended most economic routes, in a digital storage medium, relating a plurality of recommended most economic routes to at least a plurality of time of day divisions, based on the matrix of vehicle speeds. The first matrix of recommended most economic routes may be based on the matrix of vehicle speeds with outlier vehicle speeds, and vehicle speeds related to unforecastable events, removed using statistical analysis. The first matrix of recommended most economic routes may comprise a plurality of route matrix elements, each route matrix element corresponding to a pairing of an origin point with a destination point, and comprising: a route string, a shortest distance corresponding to the route string, a time corresponding to the route string, and a cost corresponding to the route string.

The route matrix elements may further comprise entries for a plurality of possible vehicle types. The system may further comprise means for determining each shortest distance string by: determining a first distance between the origin point and the first local decision node; determining a second distance between the first local decision node and the first network decision node; determining a third distance between the first network decision node and the second network decision node; determining a fourth distance between the second network decision node and the second local decision node; determining a fifth distance between the second local decision node and the destination point; and summing the first distance, the second distance, the third distance, the fourth distance, and the fifth distance to produce the shortest distance string. The system may further comprise means for determining the third distance by summing a plurality of distances corresponding to distances between successive members of the set of network decision nodes, wherein the set of network decision nodes comprises further network decision nodes in addition to the first and second network decision nodes.

In a further, related embodiment, a system comprises a congestion scheduler for identifying, in real time, an area of traffic congestion between the origin point and the destination point; and a matrix processor for determining an alternative, second matrix of recommend most economic routes based on the identified area of traffic congestion. The congestion scheduler may comprise means for identifying the area of traffic congestion using both public domain data and non-public domain data, or a database of traffic patterns; or may comprise means for identifying the area of traffic congestion by determining whether real time vehicle location data from a plurality of vehicle-bound probes correspond to a pre-determined level of variance from historic real time vehicle speeds. The system may further comprise a transmitter for transmitting a message to a user identifying a cause of the area of traffic congestion.

In a further related embodiment, the matrix processor comprises means for determining the second recommended most economic route matrix by determining a route having a shortest time between at least one pairing of origin point and destination point. The system may further comprise a forecast delay processor for calculating a forecast delay by comparing the shortest time on the second recommended most economic route matrix with a corresponding time from the first recommended most economic route matrix.

In a further related embodiment, the system comprises a traffic alert generator for transmitting traffic alert information to a user in real time, the transmission comprising at least one of: a traffic messaging channel on a radio data system; a message to a mobile telephone; or a display of data over the Internet.

In another embodiment according to the invention, a system comprises a route determination processor for determining, with reference to a first network of geographical boundaries and a second network of digital map nodes, a recommended most economic route between an origin point and a destination point; and a transmitter for transmitting the recommended most economic route to a user. The route determination processor may comprise means for determining the recommended most economic route by determining: a set of local decision nodes comprising a first local decision node, for the origin point, and a second local decision nodes, for the destination point; and a set of network decision nodes comprising a first network decision node, for the origin point, and a second network decision node, for the destination point; wherein the set of local decision nodes corresponds to links on the second network, and the set of network decision nodes corresponds to key

transportation links on the second network; and wherein the origin point and destination point are specified with reference to geographical boundaries on the first network. The geographical boundaries may comprise a set of postcodes. The recommended most economic route may minimise a journey distance, time, or cost between the origin point and the destination point. The set of network decision nodes may comprise further network decision nodes in addition to the first and second network decision nodes. At least one of the origin point, the destination point, and a member of the set of local decision nodes may also be a member of the set of network decision nodes.

In another embodiment according to the invention, a method for providing traffic information for a journey comprises performing time-dependent journey planning based on a plurality of successive route sections each having an associated vehicle speed, wherein the vehicle speed depends on the time of day at which it is predicted the route section will be traversed on the journey. In a further related embodiment, a computer program product comprises program code means adapted to control the method of the preceding embodiment. In another further related embodiment, a system for providing traffic information for a journey comprises a route planning processor for performing time-dependent journey planning based on a plurality of successive route sections each having an associated vehicle speed, wherein the vehicle speed depends on the time of day at which it is predicted the route section will be traversed on the journey.

Additional objects, advantages, and novel features of the invention will be set forth in part in the description that follows, and in part will become apparent to those skilled in the art upon examination of the following and the accompanying drawings, or may be learned by practice of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

For a better understanding of the present invention, and to show how the same may be carried into effect, reference will now be made, by way of example only, to the accompanying drawings, in which:

Fig. 1 illustrates the components of the Road Timetable TM, according to an embodiment of the invention;

Fig. 2 describes the initial data collection, according to an embodiment of the invention;

Fig. 3 describes the database support structure, according to an embodiment of the invention;

5 Fig. 4 provides the definitions for the calculation routine, according to an embodiment of the invention;

Fig. 5 provides the scope of the key elements in the calculation routine, according to an embodiment of the invention;

10 Fig. 6 identifies the characteristics of distance and speed in the calculation routine, according to an embodiment of the invention;

Fig. 7A outlines the shortest path algorithm, according to an embodiment of the invention;

Fig. 7B shows calculation of a journey time using time buckets, according to an embodiment of the invention;

15 Fig. 7C shows information stored in a matrix as a result of journey calculations, in accordance with an embodiment of the invention;

Fig. 7D shows merger of multiple nodes into a single network decision node, according to an embodiment of the invention;

20 Fig. 8 outlines the Benchmark (distance based) Road Timetable TM process, according to an embodiment of the invention;

Fig. 9 describes the Benchmark (distance based) Road Timetable TM database structure, according to an embodiment of the invention;

Fig. 10 describes the variations of the Road Timetable TM by scope, according to an embodiment of the invention;

25 Fig. 11 describes the Congestion Scheduler TM, according to an embodiment of the invention;

Fig. 12 describes the Alternative (time based) Road Timetable TM process, according to an embodiment of the invention;

30 Fig. 13 describes the Alternative (time based) Road Timetable TM database structure, according to an embodiment of the invention;

Fig. 14 describes the Traffic Alert Generator TM data flow, according to an embodiment of the invention; and

Fig. 15 describes the On-line (www) Road Timetable TM process, according to an embodiment of the invention.

DETAILED DESCRIPTION

This invention relates to the provision of forecast travel speeds for different types of road vehicle; including forecasts for specific road lengths at particular times of day, and for specific journeys throughout the day. However, it may also be applied to shipping operations, aircraft, and rail journeys; and to multi-modal journeys that combine movement in two or more modes of transport.

In accordance with one embodiment of the invention, there is provided a means for determining customized data, for more than one vehicle type. Such customized data may be used, firstly, for forecasting journey times accurately before a journey, in order to select the quickest rather than the shortest route; and secondly, in the event of traffic congestion, for offering journey information and re-routing in real-time during the journey.

More broadly, an embodiment according to the invention determines a most economic route between an origin point and a destination point. The most economic route may be defined by the user and may include, but is not limited to: the shortest route in distance; the quickest route in time; the lowest cost route; or any combination of these.

The preferred embodiment of the present invention uses traffic data collected from a number of sources, but particularly from probes in individual road vehicles. These vehicle-bound probes obtain the speed of different types of vehicles over specific road lengths at particular short time intervals throughout the day on each day of the week. Data is collected from the probes to generate a database of actual vehicle speeds over a period of time. The vehicle-bound probes may include mobile phones of the vehicles' drivers, the location of which may be sensed in a manner known to those of skill in the art; or may be other types of vehicle probes.

In accordance with an embodiment of the invention, the vehicle probe data is used in two forms.

Firstly, the vehicle probe data is used as historic data from which to forecast the speed of a defined vehicle type, either on a particular road length at a particular time, or upon a particular journey (origin to destination) at any time of day. This data is valuable information to the individual traveler, the commercial vehicle route planner, and the traffic authorities, because it offers a substantial degree of accuracy above any other current means. The forecast road speed data allows the calculation of

the fastest route for a particular journey starting at different times of day, where the fastest route may not necessarily be the shortest distance due to forecast traffic congestion in one or more road lengths making up the shortest route.

Secondly, the vehicle probe data is used as live (real time) data identifying the speed of current vehicle movements on a particular road length. This traffic information is particularly valuable to current (or potential) travelers who are either in an area of traffic congestion or approaching an area of traffic congestion. In both instances travelers will be able, by a number of alternative communication means, to obtain the reason for the traffic congestion and the current speed of vehicle types in the congested area; and to either determine a new estimated time of arrival using their current route, or to forecast whether an alternative route will enable them to arrive at their destination at an earlier time.

An embodiment according to the present invention provides a system for producing traffic information by means of:

- collecting accurate historic traffic movement data for specific vehicle types on particular route lengths at specific time periods throughout each day of the week;
- determining potential areas of traffic congestion together with reasons and the forecast of traffic speed;
- providing a database of forecast traffic speeds over particular route lengths at specific times of each day of the week;
- providing a means of up-dating the database of traffic speeds both by new data and a forecast traffic pattern in the event of known activities (for example, new road works on a particular route length);
- providing journey plans (routes) with forecast travel times for travelling at different times of the day (and on different days of the week) identifying either the route with the shortest distance or the route with the shortest travel time;
- integrating real time data to estimate a delay time at a particular traffic congestion event;
- integrating real time data to estimate time of arrival before or during a particular journey; and

- integrating real time data to determine the quickest route before or during a particular journey.

An objective of an embodiment of the present invention is to provide realistic journey times from any start point to any destination point, for different types of vehicles at different time intervals in the day, by means of selecting both the route with the shortest distance and the route with the shortest travel time. These routes may be different due to forecast travel times over particular road lengths that make up the route. These realistic journey times will take account of predictable traffic congestion due to such factors as road works or volume of traffic on a particular road length.

An embodiment according to the present invention is known as the Road Timetable TM.

A first aspect of the Road Timetable TM embodiment is the definition of a calculation framework upon which to undertake the distance and time calculation from the Origin Point (OP) to the Destination Point (DP). This calculation framework uses a combination of standard geographical boundaries (such as post codes) and nodal points which are standard to current digital mapping processes. The calculation framework defines the structure of both the database and the algorithm which make up the Road Timetable TM.

A second aspect of the Road Timetable TM embodiment is that initial vehicle speed data is collected from FVD TM probes which initially provide data sets on latitude and longitude at a reported time. From two or more such data sets, including the location and direction, it is possible to calculate the speed of a vehicle. Such historic data is accurate and may be stored in a database where the practical lowest level of detail is the speed of a particular type of vehicle on a specific road length at a particular time of a particular day and day of the week. Sufficient historic data at the lowest level of detail may be aggregated and after validation used to forecast trends and create predictions of future vehicle speeds. This is achieved by means of standard statistical averaging and forecasting techniques (such as exponential smoothing, which in a time services analysis gives greater weight to the most recent data collected).

A third aspect of the Road Timetable™ embodiment is that the FVD™ will be validated and cleansed before being added to the database. The validation process ensures that input to the database records are reasonable and are the time data created only when sufficient raw data is available to statistically validate the sample size. The
5 cleansing process take out the “outliers”(errors in reading data) and those data sets which relate to unforeseen and unforecastable events (for example, traffic accidents or security incidents). The data sets used are therefore particularly accurate reflections of forecastable events.

A fourth aspect of the Road Timetable™ embodiment is the algorithm that
10 calculates both the distance and time from OP to DP for each time period, and creates a matrix comprising distance, time, and route strings for both the shortest route and the quickest route in each time period. The creation of the distance and time matrix is an important feature of the Road Timetable™, and is necessary because customers require “immediate” answers, and generally cannot wait for extensive computing time
15 for calculation routines to be undertaken. It is the immediate answer (under 30 seconds on the computer screen from execution), together with the accuracy of the answer, which is an important feature of the Road Timetable™ as compared with other journey planning products.

In the preferred embodiment, the present invention has three separate types of
20 output. Firstly, output for “journey planning” either by individuals or traffic planners where such output could be provided by electronic form by means of a CD ROM, e-mail or the web access and up-dated on a regular basis. Such output would be used by individuals for determining the best journey route and time or by commercial traffic planners as an input to vehicle routing and scheduling systems. Secondly, output for
25 “real-time” on route (or before journey) route changes could be provided by means of web access, allowing customers to avoid, where possible, current and potential traffic congestion including known unpredictable incidents such as traffic accidents at the time of their journey.

The third type of output, in accordance with an embodiment of the invention,
30 is a forecast of traffic patterns based upon simulation of new (or hypothetical) data. Examples of such an output are the impact of opening a new road on the travel speeds from one or more location to others; or the impact of additional traffic due to a specific event (for example a sporting fixture) on the travel speeds on various roads.

Simulation output is used for traffic planning purposes, such as planning where to locate emergency service vehicles in order to achieve the required response time throughout the territory during a major sporting fixture, which attracts substantial additional traffic volumes and congestion on the local road network.

5 An embodiment according to the present invention is particularly accurate in its forecast of travel speeds on particular road lengths, and relies heavily upon the constant and regular inflow of initial data from vehicle probes in order to regularly up-date the matrix in the Road Timetable TM. It is this regular up-dating process that ensures and maintains the accuracy of the predicted journey planning distances and
10 times for the Road Timetable TM.

A preferred embodiment of the present invention will now be described, by way of example only using the accompanying drawings. Embodiments of this invention may be used for the provision of forecast travel speeds for all modes of transport including, but not limited to, short sea ferries, rail, air and any combination
15 of such modes of transport.

The components of the Road Timetable TM, which is the preferred embodiment, are outlined in Fig. 1, and include a digital map module 100, a calculation framework 110, source data 120, supplementary data 130, a road speed matrix module 150, and an algorithm-implementing module 180 to calculate the
20 solutions or output 170 in response to the customer request 140.

The Road Speed Matrix module 150 in the embodiment of Fig. 1 provides a record of the aggregate speed of each type of vehicle over each road length for each defined time bucket, where a road length is defined by the distance between two nodal points defined on a digital map. The Road Speed Matrix module 150 will provide
25 validated speeds (that is, after the data has been cleaned) and separate road speeds for each direction of travel for each vehicle type. Vehicle speeds are recorded with specific times of day and the speeds are divided into separate time buckets throughout the day where each time bucket may be a five or fifteen minute interval or whatever time interval is appropriate.

30 The Road Timetable TM module 160 in the embodiment of Fig. 1 provides a matrix comprising the route with the shortest distance between two points and the route with the lowest time - two points starting at particular times of the day on a particular day of the week using forecast vehicle speeds from the road speed matrix module 150 for each type of vehicle. The Road Timetable TM module 160 uses a

digital image of a street level map provided by digital map module 100 (which are commercially available for many counties). Digital map module 100 identifies each type of road (motorways, arterial roads, other A roads, B roads and others) and provides nodal points at variable distances along each road. Typically a nodal point is a position (defined by latitude and longitude) of a road junction, bridge or other specific road feature. For each route length the digital map could be expected to include additional data such as type of road, distance and significant features such as low bridges (with height defined in meters).

The primary source data 120 of the embodiment of Fig. 1 is date, time, latitude and longitude collected from moving vehicles by means of a probe, the sum of the information being known as floating vehicle data (FVD TM). From this primary source data 120 it is possible to calculate the speed of a particular type of vehicle travelling between two or more nodes on a particular road type. Thus, by aggregating this data, specific vehicle type travel speeds may be obtained in selected time buckets for particular road lengths – as provided by the road speed matrix module 150.

The supplementary data 130 of the embodiment of Fig. 1 is, for example, information on road works over particular road lengths, which are in the public domain and available from a number of sources. This supplementary data 130 identifies reasons for changes from one day to another in specific vehicle type travel speeds over selected road lengths in similar time buckets. The supplementary data 130 also assists with the validation of the primary source data.

The Road Timetable TM module 160 of the embodiment of Fig. 1 uses data derived from a calculation framework 110 and an adapted shortest path algorithm module 180 to derive a matrix of the shortest distances and associated time between the OP (Origin Point) and DP (Destination Point) or lowest times between the OP and DP. However, a customer request 140 for the shortest forecast time and associated distance from an OP to a DP may not be included in the matrix provided by the Road Timetable TM 160 module. In such a case, further calculations may be required using the calculation matrix 110 to provide an accurate solution.

Solutions or outputs 170 of the embodiment of Fig. 1 include a list of alternative routes between the OP and DP at a defined start time, identifying forecast journey time, distance, route (in terms of a journey plan) and a forecast of alternative journey times if starting at alternative times (for example, start 30 minutes later).

In accordance with an embodiment of the invention, the ability to forecast traffic speeds is based upon the collection, interpretation, analysis and presentation of historic traffic speeds collected by means of "floating vehicle data" (FVD™). The embodiment of Fig. 2 describes how positional and speed data is both collected and verified for the Road Timetable™ module 270. Floating vehicle data probes 210 are fitted to either a vehicle or a trailer (or any other transport mode) and these probes 210 collect data on both time and position (defined as latitude and longitude) the latter by means of the GPS (Global Positioning System) satellite system 220. Such data is store on board in a memory unit 230 and downloaded to a computer memory by either GSM or radio data download means 240. From such data is it possible to calculate both the direction of travel and speed of travel of an individual vehicle type over a particular section of road between two or more nodal points. The FVD™ data collected is verified by means of correlation with other historic data and other sensory information 250 in the public domain such as road speeds and traffic volumes from overhead sensors on the bridges, cameras on the road side or traffic spotters. Verified data is presented using the road speed matrix module 260.

The embodiment of Fig. 3 shows the inter-relationship of the key database requirements before undertaking a distance and time calculation from an origin to a destination. Initially a digital map module 300 is required, which provides a representation of nodal points (road junctions or key positions on the road), potentially down to street level detail. From this, specific nodal points may be selected, and the links from each nodal point to others both identified and described 310. Such descriptions of each link (or road length) include, but are not limited to: links to other nodal points; type of road; distance; direction of travel; restrictions (for example, bridge heights, or weight restrictions); speed limits; and special features (for example, road tolls).

In the embodiment of Fig. 3, there is also a requirement for a post code matrix module 320, which gives the background for estimated road distance, for roads not defined by the nodal points. Such estimates are calculated by means of the straight line distance multiplied by a "wobble factor," where the "wobble factor" is taken from a random sample of FVD™ containing distance calculations from actual data of vehicles travelling in the post code sector on roads that are not included in the nodal network. The post code matrix should include, in the UK for example, the following information: post code (at sector level, for example BL1 5); list of adjacent post

codes; all nodal points in the post code; "wobble factor" in the post code (ratio of the average distance of each route length divided by the as-the-crow-flies displacement between the two endpoints - for example, 1.24); and the speed for each type of vehicle in the post code for each time bucket and day of the week

5 The FVD™ 330 of the embodiment of Fig. 3 defines the average speed of each vehicle type between nodal points in each time bucket collected from the individual vehicles. The time buckets selected represent a practical means to sum of data collected into relevant groupings to simplify the calculation and minimize the computing time. The data is verified and presented using the road speed matrix
10 module 340.

Calculating the Road Timetable™ Data

In the preferred embodiment of this invention, the problem of determining both the distance and the alternative timings from one point to another is structured in
15 the manner described in the embodiments of Figs. 4 and 5. In Figs. 4 and 5, the "ORIGIN POINT" (OP) 410 and 510 is described as a postcode (alternatively zip code or other similar means), which is converted into a latitude and longitude by means of currently available mapping software. The "LOCAL DECISION NODE" (LDN) 420, 450, 520 and 550 of Figs. 4 and 5 is the nearest recognised nodal point to
20 the OP or DP in the direction of travel. Typically a LDN will be selected from A road junctions, railheads, distribution centers, manufacturing centers or retail parks. In some instances users may wish to set up their own LDN structure (for example, a retailer may define its warehouses and each of its retail stores as LDNs). The "NETWORK DECISION NODE" (NDN) 430, 440, 530 and 540 of Figs. 4 and 5 is
25 the nearest key road link (motorway link, primary route link or specially selected link) to the OP or DP by direction of travel. The "DESTINATION POINT" (DP) 460 and 560 of Figs. 4 and 5 is described as a postcode (alternatively zip code or other similar means), which is converted into latitude and longitude by means of currently available mapping software.

30 Based upon the structure of the embodiments of Figs. 4 and 5, the shortest distance and time between the OP and DP is calculated as shown in the embodiment of Fig. 6. First, both "OP" 610 and "DP" 660 are recognized as postcodes (or equivalent) and translated into latitudes and longitudes (by means of software). A validation process is conducted to check the postcodes given. Next, the direction of

travel from the OP 610 to the DP 660 is calculated in degrees (where North equals both 0° and 360°). The LDN database is then searched to determine all LDNs in the OP 610 postcode and adjacent postcodes, and the nearest LDN 620 to the OP 610 in the direction of travel (based upon straight line distance) is selected. Next, the

5 “forecast distance” from the OP 610 to the selected LDN 620 is calculated by multiplying the straight line distance by a “wobble factor,” shown on a postcode database and calculated as the average from a sample of actual data collected for each postcode. Next, the “forecast time” from the OP 610 to the selected LDN 620 is calculated by determining a speed per mile for each “forecast mile,” where the speed

10 is defined in the postcode database for each time bucket by day of the week for each postcode, and is calculated from a sample of actual data collected for each postcode. Next, the first NDN 630 is selected from the NDN database, from amongst those NDNs that are linked to the LDN 620 by the direction of travel. Next, the actual distance from LDN 620 to the NDN 630 is determined using the database and the

15 mapping software. Next, the forecast time from the LDN 620 to the NDN 630 is calculated for the road type (by means of the mapping software), vehicle type and time bucket, by day of the week, from an estimated start time. Next, the LDN 650 and NDN 640 for the DP 660 is determined, and the forecast distance and forecast time are calculated by the same means as described above for the OP distance and

20 time calculations. Next, the distance between the nearest NDN to the OP 630 and the nearest NDN to the DP 640 is calculated by means of the “shortest path algorithm” – an example of which is shown in Fig. 7A. Next, the forecast time for the shortest path between the nearest NDN to the OP 630 and the nearest NDN to the DP 640 is calculated, based on the vehicle type and the sum of actual speeds (determined from

25 FVD™ data), for each road length, in each relevant time bucket, by day of the week. Next, the forecast distances and forecast times from the OP 610 to the DP 660 are summed to provide the solution 170.

An important feature of an embodiment according to the present invention is that the calculation routine uses the time buckets in such a manner that as the route is

30 built up, the time buckets selected represent the time bucket in which the vehicle is traveling. Thus, from a defined start time, it is possible to accurately reflect the journey time based upon the data sets in the road speed matrix 150 for each time bucket.

Fig. 7B shows calculation of a journey time using time buckets in such a manner, in accordance with an embodiment of the invention. As shown in Fig. 7B, as the route between the OP and the DP is calculated, a different time zone is used (Time Zone 1 through Time Zone 5) for performing the relevant time-dependent calculations for each time division that will occur during the route. Thus, for example, the time of day corresponding to Time Zone 1 is used for calculating how long it will take for the journey between the OP and the first LDN; then the time of day corresponding to Time Zone 2 is used for calculating how long it will take for the journey between NDN1 and NDN2; then Time Zone 3, Time Zone 4, and Time Zone 5, in a similar fashion. In each case, floating vehicle data for a given route segment is looked up using the time of day corresponding to the Time Zone that the vehicle will be in when it has reached that point in the journey. Thus, calculations of journey times will be correctly built up based on changing traffic congestion patterns on the route segments as the journey progresses.

Fig. 7C shows how both a shortest distance route 71 and a shortest time route 72 may be built up by such calculations, in accordance with an embodiment of the invention. As shown in Fig. 7C, after the calculations are performed, the following information may be stored in a rapid access matrix, for later consultation in performing journey computations: the shortest distance route string 71 and its corresponding distance D1, time T1, and cost C1; and the shortest time route string 72 and its corresponding distance D2, time T2, and cost C2.

In addition, the lowest cost route may be calculated in a similar fashion. Regardless of the type of route calculated, the calculated costs may include the fixed cost associated with the vehicle (e.g. road fund license); the variable costs associated with the vehicle (e.g. fuel costs); the drivers costs; and any costs associated with the route taken (e.g. road tolls, bridge tolls, or congestion charges).

As shown in the embodiment of Fig. 7D, it should also be noted that links on the calculated route need not be designated exclusively as an origin or destination point, a local decision node, or a network decision node; nor must all such categories of links be used in calculating a route. Instead, for example, an OP or DP, an LDN, or more than one of such points, may be merged into a single node 73 or 74 for calculating a given route. This merged node may be designated, for example, to be a single network decision node 73 or 74. Alternatively, routes may be calculated directly between a pair of NDN's, without using an OP/DP or LDN; or may be

calculated between two LDN's; or between other node types, as will be apparent to those of ordinary skill in the art.

From similar calculation routines it is possible, in accordance with an embodiment of the invention, to select either the route with the shortest distance or the lowest time from the OP 610 to the DP 660. In some instances the route with the shortest distance will also be the route with the shortest time, but if timings differ for alternative sections of road length, where all the timings are below the maximum legally permitted travel speed, then the route with the forecast fastest journey time may not be the route with the shortest distance.

Data Accuracy:

It is recognised that for commercial applications of the Road Timetable TM, in accordance with an embodiment of the invention, a key element is the accuracy of the data provided, particularly the forecast time for the route. An essential element of an embodiment according to the invention is therefore the manner in which accurate forecast travel times are obtained and maintained for each route. In order to ensure accuracy, three elements of the Road Timetable TM module are linked together, in an embodiment according to the invention, to achieve different customer goals. The three elements are, first, the Benchmark Road Timetable TM module, for a shortest distance based solution with an associated travel time; second, the Road Timetable TM module with Congestion Scheduler TM for alternative time based solutions considering traffic data in the public domain; and third, the Road Timetable TM module with "Traffic Alert Generator"TM for "real time" live time based solutions that consider traffic data available in real time from local sources.

The Benchmark Road Timetable TM module is presented in the embodiment of Fig. 8. This version of the Road Timetable TM module recognizes that the majority of both the distance and time on each route will be from the NDN nearest the OP 630 to the NDN nearest the DP 640. The Benchmark Road Timetable TM module therefore uses FVD TM data 830 and sorts this into selected time buckets for each route length of an NDN to the adjacent NDNs 840. Then, by the combination of the digital map data 870 and the shortest distance algorithm 850, it is possible to calculate a Road Timetable TM matrix containing the shortest distance and a given speed between all NDNs in the road network.

In accordance with an embodiment of the invention, based upon data for separate counties 800 and separate vehicle types 810, the customer request data 820 (for a distance and time from an OP 610 to a DP 660) can be calculated quickly using a look-up table provided by the Benchmark Road Timetable TM module. The matrix
5 containing route data from one NDN to all other NDNs requires considerable computer-based computation time, and the calculation of OP to DP may be undertaken quickly if these calculations are undertaken and stored in a look-up table. Instead of a look-up table, any other rapid access means may be used, i.e. any
10 memory means capable of storing the results of the matrix calculation. Pre-calculating these results and storing them in a rapid access means may considerably reduce computation time.

To ensure accuracy, the Benchmark Road Timetable TM module can provide a database structure, as shown in the embodiment of Fig. 9, giving the distance (miles or kilometers), travel time (minutes) and the route description (by road number and
15 direction) from one NDN to all other NDNs on the network. This database can also be presented by vehicle type, day of the week, and time bucket. "Vehicle Types" can include, but are not limited to, such definitions as cars, light vans, medium vans, light commercials, heavy goods vehicles, and coaches. "Days of the week" can include, but are not limited to, such definitions as Sunday, Monday, Tuesday, Wednesday,
20 Thursday, Friday, Saturday, Bank Holiday, Day before Bank Holiday, and Day after Bank Holiday. "Time buckets" can include, but are not limited to, any combination of a 5 minute interval throughout the day – such that, for example, an equal volume of 15 minute intervals throughout the day gives 96 time buckets per day.

In accordance with an embodiment of the invention, the accuracy of the
25 database provided by the Benchmark Road Timetable TM module is maintained by re-processing the look-up table. Such re-processing may be performed, firstly, when the road network or digital map data 870 is updated (because the Benchmark Road Timetable TM module seeks to present a distance based solution, and therefore relies on accurate digital map distances). The look-up table may also be re-processed when
30 more FVD is available that changes the data in any individual time bucket by more than 5% (in order to update specific speed calculations).

The accuracy of the database provided by the Benchmark Road Timetable TM module is further improved, as shown in the embodiment of Fig. 10, by use of the Congestion Scheduler TM 1020, which updates route times and offers the shortest time

journey between the OP 610 and the DP 660; and by use of the Traffic Alert Generator TM 1050, which updates the route in real time over the WWW (World Wide Web) based upon local traffic flash reports and real time FVD TM data.

In accordance with an embodiment of the invention, the Congestion SchedulerTM forecasts potential traffic congestion on particular lengths of road at particular times of the day, and particular days of the week, and estimates travel speed for each type of vehicle. The Congestion Scheduler TM is built up of many elements, as shown in the embodiment of Fig. 11, and is based upon the record of the definition of potential congestion issues 1150. Such issues are identified by means of traffic data in the public domain 1110 (such as actual road works over a stretch of road); or by means of data not in the public domain 1120 (such as information that a wide load is travelling over a particular road length that is known to the police authority and "quoted" by the police as a potential problem); or by means of FVD TM data 1140 selected because current readings offer a substantial variance from the average recorded historically. Actual vehicle speeds over the particular road length identified as a potential congestion issue are obtained and verified from a combination of vehicle probes and other sensory data 1130.

In accordance with the embodiment of Fig. 11, where no actual vehicle speeds are available to determine the speed of each vehicle type through the potential congestion issue in each time bucket, then an approximation of vehicle speed is used from the Traffic Patterns Bank TM. The Traffic Patterns Bank TM is a record of vehicle speeds in each time bucket over particular stretches of road that define vehicle flow characteristics and type of congestion that has occurred. Roads with similar characteristics are selected to determine the data from the Traffic Pattern Bank TM

In the embodiment of Fig. 11, the Congestion Scheduler TM defines the type of incident on a road length from one NDN to all adjacent NDNs 1170 and forecasts the travel speed of each vehicle type in each time bucket 1150 by day of the week. Typical issues resulting in traffic congestion may include, but are not limited to, peak traffic volumes, school start and finish times, road works, events (particularly sporting and cultural), and weather (floods or high winds).

In accordance with an embodiment of the invention, for simplicity of reporting severity of congestion on a particular road length (one NDN to an adjacent NDN or another NDN), each issue may be defined by effect into one or more categories. For example, the categories may be as follows:



CATEGORY	CONGESTION EFFECT	DESCRIPTION
One	50% of maximum legal speed limit for type of vehicle per defined road length	Congested
Two	30% of maximum legal speed limit for type of vehicle over defined road length	Slow
Three	20% of maximum legal speed limit for type of vehicle over defined road length	Very Slow
Four	Less than 3mph over defined road length	Stationary
Five	Defined road length not available to traffic	Closed

By combining the congestion issue, effect, and a single or series of time buckets by day of the week, it is possible, in accordance with an embodiment of the invention, to give a short description of any potential traffic congestion; for example:

“A6 at Westhoughton road works from 0700 hrs to 1600 hrs today may lead to very slow traffic in both directions”.

Congestion issues, therefore, may be defined by location (NDN to NDN), type of issue, time, day of the week, effect and direction of travel affected.

In accordance with an embodiment of the invention, the Congestion Scheduler™ improves the accuracy of the forecast speed in the Road Timetable™ and provides the first alternative time based routes. The process, as described in the embodiment of Fig. 12, starts with the Benchmark Road Timetable™ module 1210 and tests the selected shortest path for congestion 1220 by means of the list of congestion issues 1230 or the Traffic Pattern Bank™ 1240. All data collection means 1250 are used to verify and validate traffic congestion in historic terms 1260 to use in a shortest time algorithm module 1270 which, by means of digital map data 1240, provides a shortest time route from an OP 610 to a DP 660 and an alternative time based Road Timetable™ 1280.

The alternative time based Road Timetable™ is also presented as a database – see the embodiment of Fig. 13 – in a similar manner to the Benchmark Road Timetable™. However, in this instance shorter travel time is the dominant factor in the matrix.

By means of comparison of the “time” solution from the Benchmark Road Timetable™ module and the “time” solution from the second Road Time Table™ with the Congestion Scheduler™ it is possible to calculate the “forecast delay,” in accordance with an embodiment of the invention. Some radio stations prefer to describe traffic congestion in terms of “forecast delay” in minutes to assist those currently traveling or potentially traveling along a route which includes the congested area.

An embodiment of the invention also considers the impact of severe congestion on one route length with traffic patterns on adjacent roads. Thus, any routes passing on adjacent routes to known traffic congestion will have their route speed down graded to allow for the transfer of traffic from one road to another. The Traffic Pattern Bank™ selects all potential routes which could be affected in the event of congestion.

In accordance with an embodiment of the invention, even greater additional accuracy is required for real-time traffic forecasting insofar as short-term influences such as weather (for example, fog), traffic accidents or damage to the road surface (for example, a burst water main) may have a profound impact upon traffic speeds. The Traffic Alert Generator™, described in the embodiment of Fig. 14, addresses real-time traffic issues and allows up-to-date traffic information to be used for a real-time Road Timetable™ offered over the WWW.

In the embodiment of Fig. 14, the Traffic Alert Generator TM collects lists of potential short-term incidents 1400, from police or other sources (for example, Automobile Association patrol staff); and from data in the public domain 1430, from such sources as broadcasts on local or national radio. In addition, vehicle probes and other sensory data 1410 are used to verify the reports and establish the current speed of traffic on the road length affected. The combination of such information is consolidated as a traffic incident description 1420, and again the congestion effect may be used to give a short description of known traffic congestion, for example:

“A6 at Westhoughton a traffic accident in the last hour has led to stationary traffic in both directions 2 miles northbound towards Chorley and 4 miles southbound towards Swinton”.

The dissemination of this information in real-time either through RDS-TMC (Radio Data System – Traffic Messaging Channel) or direct to a mobile telephone or computer by GSM (Global Systems for Mobiles) or GPRS (General Packet Radio Services) is known as the Traffic Alert Generation 1440. The information is also reported into the real-time Road Timetable TM in order to re-calculate either the time to be taken to undertake and complete a Benchmark Road Timetable TM route, or to determine the shortest time route given the traffic incidents.

Fig. 15 describes the application of the Traffic Alert Generator TM for real-time reporting of the Road Timetable TM, in accordance with an embodiment of the invention. The process starts with the alternative (time-based) Road Timetable TM 1510, which is tested for real-time data on congestion 1520. Data in terms of traffic incident descriptions 1550 is collected locally and converted to real-time data 1560 to recognize routes affected by real-time issues and passed to the Traffic Alert Generator TM 1530. A validation process checks with FVD TM 1500 that current traffic speeds have substantially deteriorated otherwise data is taken from the Traffic Patterns Bank TM 1540 to replace historic data. A shortest time algorithm 1570 and digital map data 1590 are used to calculate a line time based Road Timetable TM 1580 which is immediately available on the Worldwide Web. This on-line (WWW) Road Timetable TM 1580 is continuously up-dated for short-term local congestion issues; then, when through the FVD TM 1500 vehicle speeds are returned to normal (the historic average), the incident is disregarded. However, a database of such short-term

local issues is maintained as part of the Traffic Patterns Bank TM 1540 for use on other occasions should a similar situation arise.

The various apparatus modules described herein may be implemented using general purpose or application specific computer apparatus. The hardware and software configurations indicated for the purpose of explaining the preferred embodiment should not be limiting. Similarly, the software processes running on them may be arranged, configured, or distributed in any manner suitable for performing the invention as defined in the claims.

A skilled reader will appreciate that, while the foregoing has described what is considered to be the best mode, and where appropriate, other modes of performing the invention, the invention should not be limited to the specific apparatus configurations or method steps disclosed in this description of the preferred embodiment. Those skilled in the art will also recognize that the invention has a broad range of applications, and the embodiments admit of a wide range of modifications without departing from the inventive concepts.

What is claimed is:

1. A method for providing traffic information, the method comprising:

for each segment of a route between an origin point and a destination point,
performing a time-dependent journey planning calculation, based on a time during
5 which a vehicle is predicted to be travelling through the segment, to produce a
segment result;

forming at least one route result, the at least one route result being formed
based on a plurality of the segment results;

storing the at least one route result in a digital storage means; and

10 accessing the rapid access means for use in responding to a user request for
traffic information for a journey between the origin point and the destination point.

2. A method according to claim 1, wherein performing the time-dependent journey
planning calculation for each segment comprises determining a segment duration for
15 traversing the segment based on a predicted vehicle speed for the segment at the time
during which the vehicle is predicted to be travelling through the segment.

3. A method according to claim 2, wherein forming the at least one route result
comprises summing a plurality of segment durations to produce an overall route
20 duration.

4. A method according to claim 1, wherein performing the time-dependent journey
planning calculation for each segment comprises determining a predicted vehicle
speed for traversing the segment based on the time during which the vehicle is
25 predicted to be travelling through the segment.

5. A method according to claim 4, wherein forming the at least one route result
comprises averaging a plurality of predicted vehicle speeds, each corresponding to a
segment, to produce an overall predicted route speed.

30

6. A method according to claim 1, wherein performing the time-dependent journey
planning calculation is based on a time of day and a day of the week during which the
vehicle is predicted to be travelling through the segment.

7. A method according to claim 6, wherein the day of the week is selected from a group comprising Bank Holiday, Day before Bank Holiday, Day after Bank Holiday, Sunday, Monday, Tuesday, Wednesday, Thursday, Friday, and Saturday.

5 8. A method for providing traffic information, the method comprising:

pre-determining at least a portion of a recommended most economic route between an origin point and a destination point;

storing the pre-determined portion of the recommended most economic route in a rapid access means in a digital storage means; and

10 accessing the rapid access means for use in responding to a user request for traffic information for a journey between the origin point and the destination point.

9. A method according to claim 8, wherein the pre-determined portion of the recommended most economic route comprises a route between a first network decision node, for the origin point, and a second network decision node, for the destination point;

and wherein the first and second network decision nodes are nodes, of a network of digital map nodes, that correspond to key transportation links.

20 10. A method according to claim 8, wherein the rapid access means comprises a look-up table.

11. A method according to claim 8, wherein pre-determining at least a portion of the recommended most economic route comprises determining a shortest time route between the origin point and the destination point.

12. A method according to claim 8 or 11, wherein pre-determining at least a portion of the recommended most economic route comprises determining a shortest distance route between the origin point and the destination point.

30 13. A method for providing traffic information, the method comprising:

determining, with reference to a first network of geographical boundaries and a second network of digital map nodes, a recommended most economic route between an origin point and a destination point; and

transmitting the recommended most economic route to a user.

14. A method according to claim 13, wherein the recommended most economic route is further determined by determining: a set of local decision nodes comprising a first
5 local decision node, for the origin point, and a second local decision node, for the destination point; and a set of network decision nodes comprising a first network decision node, for the origin point, and a second network decision node, for the destination point;

10 wherein the set of local decision nodes corresponds to links on the second network, and the set of network decision nodes corresponds to key transportation links on the second network;

and wherein the origin point and destination point are specified with reference to geographical boundaries on the first network.

15 15. A method according to claim 13, wherein the geographical boundaries comprise a set of postcodes.

16. A method according to claim 13, wherein the recommended most economic route minimises a journey distance between the origin point and the destination point.

20 17. A method according to claim 13 or 16, wherein the recommended most economic route minimises a journey time between the origin point and the destination point.

25 18. A method according to claim 13, wherein the recommended most economic route minimises a journey cost between the origin point and the destination point.

19. A method according to claim 14, wherein the set of network decision nodes comprises further network decision nodes in addition to the first and second network decision nodes.

30 20. A method according to claim 14, wherein at least one of the origin point, the destination point, and a member of the set of local decision nodes is also a member of the set of network decision nodes.

21. A method according to claim 14, further comprising:

pre-determining at least a portion of the recommended most economic route,
the pre-determined portion comprising a route between the first network decision
node and the second network decision node;

5 storing the pre-determined portion in a rapid access means in a digital storage
medium; and

accessing the rapid access means for use in transmitting the recommended
most economic route to the user.

10 22. A method according to claim 21, wherein the rapid access means comprises a
look-up table.

23. A method according to claim 1, 9, or 14, further comprising:

receiving real time data relating to real time vehicle location from a plurality
15 of vehicle-bound probes; and

creating a matrix of vehicle speeds relative to at least a plurality of time of day
divisions and a plurality of routes, based on the real time vehicle location data.

24. A method according to claim 23, wherein the plurality of vehicle-bound probes
20 include at least one mobile telephone.

25. A method according to claim 23, further comprising:

creating a first matrix of recommended most economic routes relative to at
least a plurality of time of day divisions and a plurality of routes, based on the matrix
25 of vehicle speeds.

26. A method according to claim 25, further comprising, in creating the first matrix
of recommended most economic routes, removing outlier vehicle speeds, and vehicle
speeds related to unforecastable events, from the matrix of vehicle speeds using
30 statistical analysis.

27. A method according to claim 25, wherein the first matrix of recommended most
economic routes comprises a plurality of route matrix elements, each route matrix
element corresponding to a pairing of an origin point with a destination point, and

comprising: a route string, a shortest distance corresponding to the route string, a time corresponding to the route string, and a cost corresponding to the route string.

28. A method according to claim 27, wherein the route matrix elements further
5 comprise entries for a plurality of possible vehicle types.

29. A method according to claim 27, wherein each shortest distance string is determined by:

10 determining a first distance between the origin point and the first local decision node;

determining a second distance between the first local decision node and the first network decision node;

determining a third distance between the first network decision node and the second network decision node;

15 determining a fourth distance between the second network decision node and the second local decision node;

determining a fifth distance between the second local decision node and the destination node; and

20 summing the first distance, the second distance, the third distance, the fourth distance, and the fifth distance to produce the shortest distance string.

30. A method according to claim 29, wherein determining the third distance comprises summing a plurality of distances corresponding to distances between successive members of the set of network decision nodes, and wherein the set of
25 network decision nodes comprises further network decision nodes in addition to the first and second network decision nodes.

31. A method according to claim 25, further comprising:

30 identifying, in real time, an area of traffic congestion between the origin point and the destination point; and

determining an alternative, second matrix of recommended most economic routes based on the identified area of traffic congestion.

32. A method according to claim 31, wherein the area of traffic congestion is identified using both public domain data and non-public domain data.

33. A method according to claim 31, wherein the area of traffic congestion is identified using a database of traffic patterns.

34. A method according to claim 31, wherein the area of traffic congestion is identified by determining whether real time vehicle location data from a plurality of vehicle-bound probes correspond to a pre-determined level of variance from historic real time vehicle speeds.

35. A method according to claim 31, further comprising:

transmitting a message to a user identifying a cause of the area of traffic congestion.

36. A method according to claim 31, wherein the second recommended most economic route matrix is determined by determining a route having a shortest time between at least one pairing of origin point and destination point.

37. A method according to claim 36, further comprising calculating a forecast delay by comparing the shortest time on the second recommended most economic route matrix with a corresponding time from the first recommended most economic route matrix.

38. A method according to claim 29, further comprising transmitting traffic alert information to a user in real time, the transmission comprising at least one of: a traffic messaging channel on a radio data system; a message to a mobile telephone; or a display of data over the Internet.

39. A computer program product comprising program code means adapted to control the method of claim 1, 8, 13, or 14.

40. A system for providing traffic information, the system comprising:

a route segment processor for performing, for each segment of a route between an origin point and a destination point, a time-dependent journey planning calculation based on a time during which a vehicle is predicted to be travelling through the segment, to produce a segment result;

5 a route result formation means for forming at least one route result, the at least one route result being formed based on a plurality of the segment results;

a rapid access means, in a digital storage means, for storing the at least one route result; and

10 a user request processor for accessing the rapid access means for use in responding to a user request for traffic information for a journey between the origin point and the destination point.

41. A system according to claim 40, wherein the route segment processor comprises means for determining a segment duration for traversing each segment, based on a
15 predicted vehicle speed for the segment at the time during which the vehicle is predicted to be travelling through the segment.

42. A system according to claim 41, wherein the route result formation means comprises means for summing plurality of segment durations to produce an overall
20 route duration.

43. A system according to claim 40, wherein the route segment processor comprises means for determining a predicted vehicle speed for traversing the segment based on the time during which the vehicle is predicted to be travelling through the segment.
25

44. A system according to claim 43, wherein the route result formation means comprises means for averaging a plurality of predicted vehicle speeds, each corresponding to a segment, to produce an overall predicted route speed.

30 45. A system according to claim 40, wherein the route segment processor comprises means for performing the time-dependent journey planning calculation based on a time of day and a day of the week during which the vehicle is predicted to be travelling through the segment.

46. A system according to claim 45, wherein the day of the week is selected from a group comprising Bank Holiday, Day before Bank Holiday, Day after Bank Holiday, Sunday, Monday, Tuesday, Wednesday, Thursday, Friday, and Saturday.

5 47. A system for providing traffic information, the system comprising:

a route pre-determination processor for pre-determining at least a portion of a recommended most economic route between an origin point and a destination point;

a rapid access means in a digital storage means, for storing the pre-determined portion of the recommended most economic route; and

10 a user request processor for accessing the rapid access means for use in responding to a user request for traffic information for a journey between the origin point and the destination point.

15 48. A system according to claim 47, wherein the pre-determined portion of the recommended most economic route comprises a route between a first network decision node, for the origin point, and a second network decision node, for the destination point;

and wherein the first and second network decision nodes are nodes, of a network of digital map nodes, that correspond to key transportation links.

20 49. A system according to claim 47, wherein the rapid access means comprises a look-up table.

25 50. A system according to claim 47, wherein the route pre-determination processor comprises means for determining a shortest time route between the origin point and the destination point.

30 51. A system according to claim 47 or 50, wherein the route pre-determination processor comprises means for determining a shortest distance route between the origin point and the destination point.

52. A system for providing traffic information, the system comprising:

a route determination processor for determining, with reference to a first network of geographical boundaries and a second network of digital map nodes, a

recommended most economic route between an origin point and a destination point;
and

a transmitter for transmitting the recommended most economic route to a user.

- 5 53. A system according to claim 52, wherein the route determination processor comprises means for determining the recommended most economic route by determining: a set of local decision nodes comprising a first local decision node, for the origin point, and a second local decision node, for the destination point; and a set of network decision nodes comprising a first network decision node, for the origin
10 point, and a second network decision node, for the destination point;
wherein the set of local decision nodes corresponds to links on the second network, and the set of network decision nodes corresponds to key transportation links on the second network;
and wherein the origin point and destination point are specified with reference
15 to geographical boundaries on the first network.
54. A system according to claim 52, wherein the geographical boundaries comprise a set of postcodes.
- 20 55. A system according to claim 52, wherein the recommended most economic route minimises a journey distance between the origin point and the destination point.
56. A system according to claim 52 or 55, wherein the recommended most economic route minimises a journey time between the origin point and the destination point.
- 25 57. A system according to claim 52, wherein the recommended most economic route minimises a journey cost between the origin point and the destination point.
58. A system according to claim 53, wherein the set of network decision nodes
30 comprises further network decision nodes in addition to the first and second network decision nodes.

59. A system according to claim 53, wherein at least one of the origin point, the destination point, and a member of the set of local decision nodes is also a member of the set of network decision nodes.

5 60. A system according to claim 53, further comprising:

a route pre-determination processor for pre-determining at least a portion of a recommended most economic route between an origin point and a destination point;

a rapid access means in a digital storage means, for storing the pre-determined portion of the recommended most economic route; and

10 a user request processor for accessing the rapid access means for use in responding to a user request for traffic information for a journey between the origin point and the destination point.

61. A system according to claim 60, wherein the rapid access means comprises a
15 look-up table.

62. A system according to claim 40, 48, or 53, further comprising:

a real time data receiver for receiving real time data relating to real time vehicle location from a plurality of vehicle-bound probes; and

20 a matrix, in a digital storage means, relating vehicle speeds to at least a plurality of time of day divisions and a plurality of routes, based on the real time vehicle location data.

63. A system according to claim 62, wherein the plurality of vehicle-bound probes
25 includes at least one mobile telephone.

64. A system according to claim 62, further comprising:

a first matrix of recommended most economic routes, in a digital storage medium, relating a plurality of recommended most economic routes to at least a

30 plurality of time of day divisions, based on the matrix of vehicle speeds.

65. A system according to claim 64, wherein the first matrix of recommended most economic routes is based on the matrix of vehicle speeds with outlier vehicle speeds, and vehicle speeds related to unforecastable events, removed using statistical analysis.

66. A system according to claim 64, wherein the first matrix of recommended most economic routes comprises a plurality of route matrix elements, each route matrix element corresponding to a pairing of an origin point with a destination point, and
5 comprising: a route string, a shortest distance corresponding to the route string, a time corresponding to the route string, and a cost corresponding to the route string.

67. A system according to claim 66, wherein the route matrix elements further comprise entries for a plurality of possible vehicle types.

10 68. A system according to claim 66, further comprising means for determining each shortest distance string by:

determining a first distance between the origin point and the first local decision node;

15 determining a second distance between the first local decision node and the first network decision node;

determining a third distance between the first network decision node and the second network decision node;

20 determining a fourth distance between the second network decision node and the second local decision node;

determining a fifth distance between the second local decision node and the destination point; and

25 summing the first distance, the second distance, the third distance, the fourth distance, and the fifth distance to produce the shortest distance string.

69. A system according to claim 68, further comprising means for determining the third distance by summing a plurality of distances corresponding to distances between successive members of the set of network decision nodes, and wherein the set of network decision nodes comprises further network decision nodes in addition to the
30 first and second network decision nodes.

70. A system according to claim 64, further comprising:

a congestion scheduler for identifying, in real time, an area of traffic congestion between the origin point and the destination point; and

a matrix processor for determining an alternative, second matrix of recommend most economic routes based on the identified area of traffic congestion.

71. A system according to claim 70, wherein the congestion scheduler comprises means for identifying the area of traffic congestion using both public domain data and non-public domain data.

72. A system according to claim 70, wherein the congestion scheduler comprises means for identifying the area of traffic congestion using a database of traffic patterns.

73. A system according to claim 70, wherein the congestion scheduler comprises means for identifying the area of traffic congestion by determining whether real time vehicle location data from a plurality of vehicle-bound probes correspond to a pre-determined level of variance from historic real time vehicle speeds.

74. A system according to claim 70, further comprising a transmitter for transmitting a message to a user identifying a cause of the area of traffic congestion.

75. A system according to claim 70, wherein the matrix processor comprises means for determining the second recommended most economic route matrix by determining a route having a shortest time between at least one pairing of origin point and destination point.

76. A system according to claim 75, further comprising a forecast delay processor for calculating a forecast delay by comparing the shortest time on the second recommended most economic route matrix with a corresponding time from the first recommended most economic route matrix.

77. A system according to claim 68, further comprising a traffic alert generator for transmitting traffic alert information to a user in real time, the transmission comprising at least one of: a traffic messaging channel on a radio data system; a message to a mobile telephone; or a display of data over the Internet.

78. A method for providing traffic information for a journey, the method comprising:
performing time-dependent journey planning based on a plurality of
successive route sections each having an associated vehicle speed, wherein the vehicle
speed depends on the time of day at which it is predicted the route section will be
5 traversed on the journey.

79. A computer program product comprising program code means adapted to control
the method of claim 78.

10 80. A system for providing traffic information for a journey, the system comprising:
a route planning processor for performing time-dependent journey planning
based on a plurality of successive route sections each having an associated vehicle
speed, wherein the vehicle speed depends on the time of day at which it is predicted
the route section will be traversed on the journey.

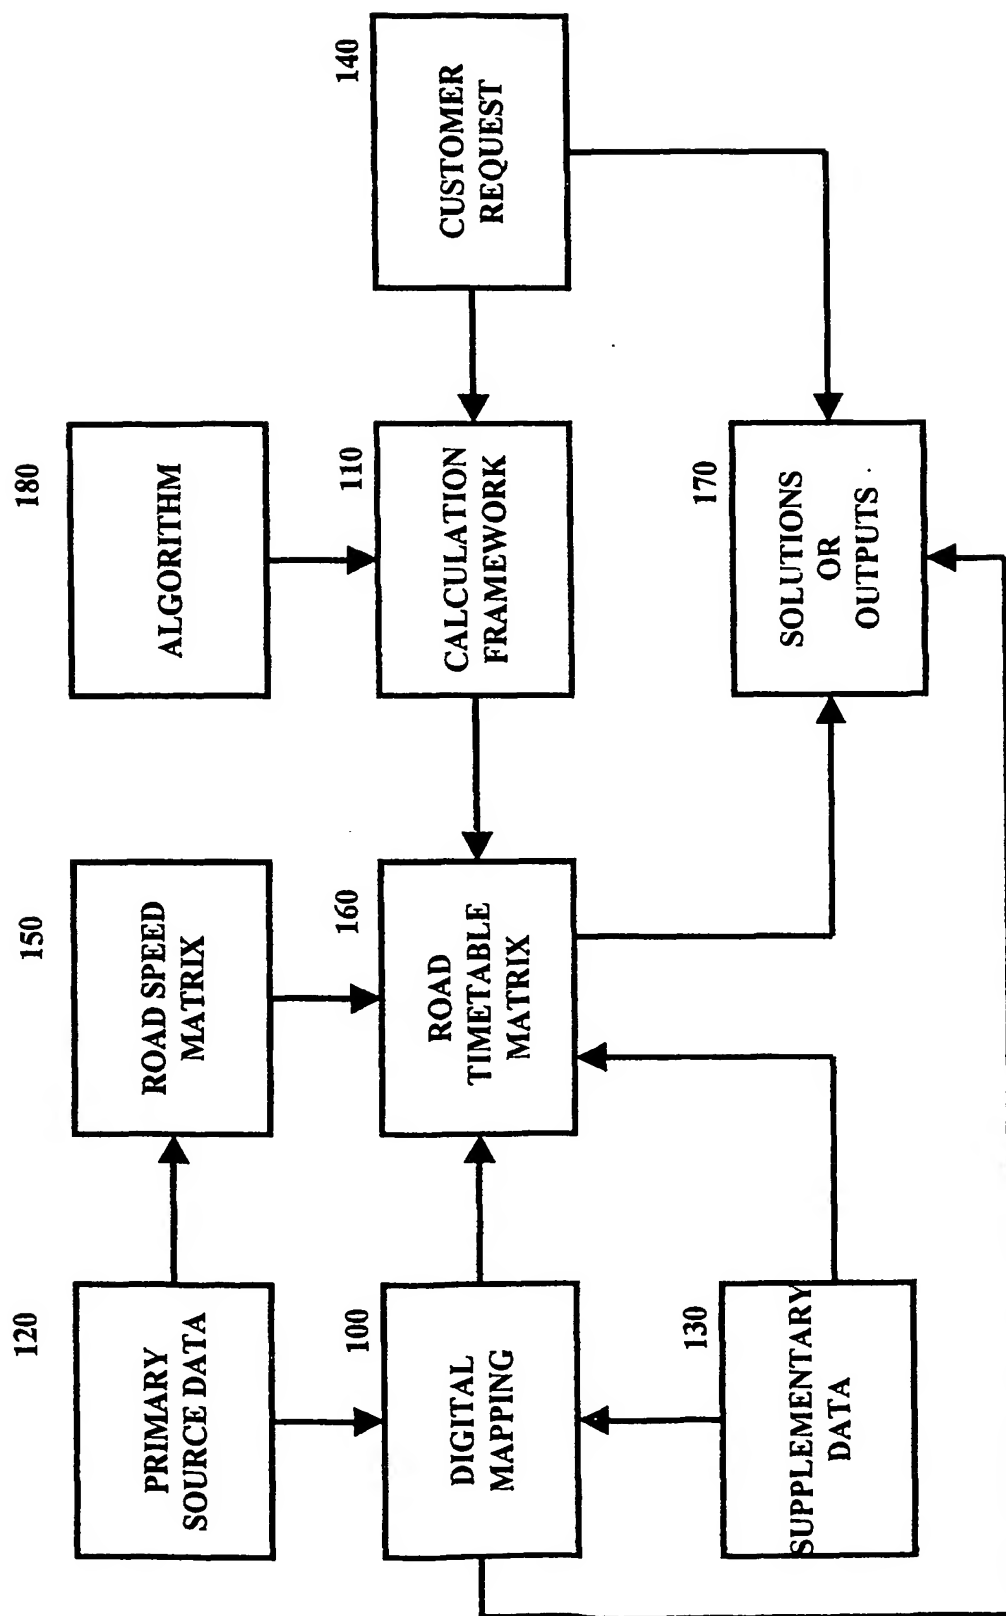


FIGURE 1

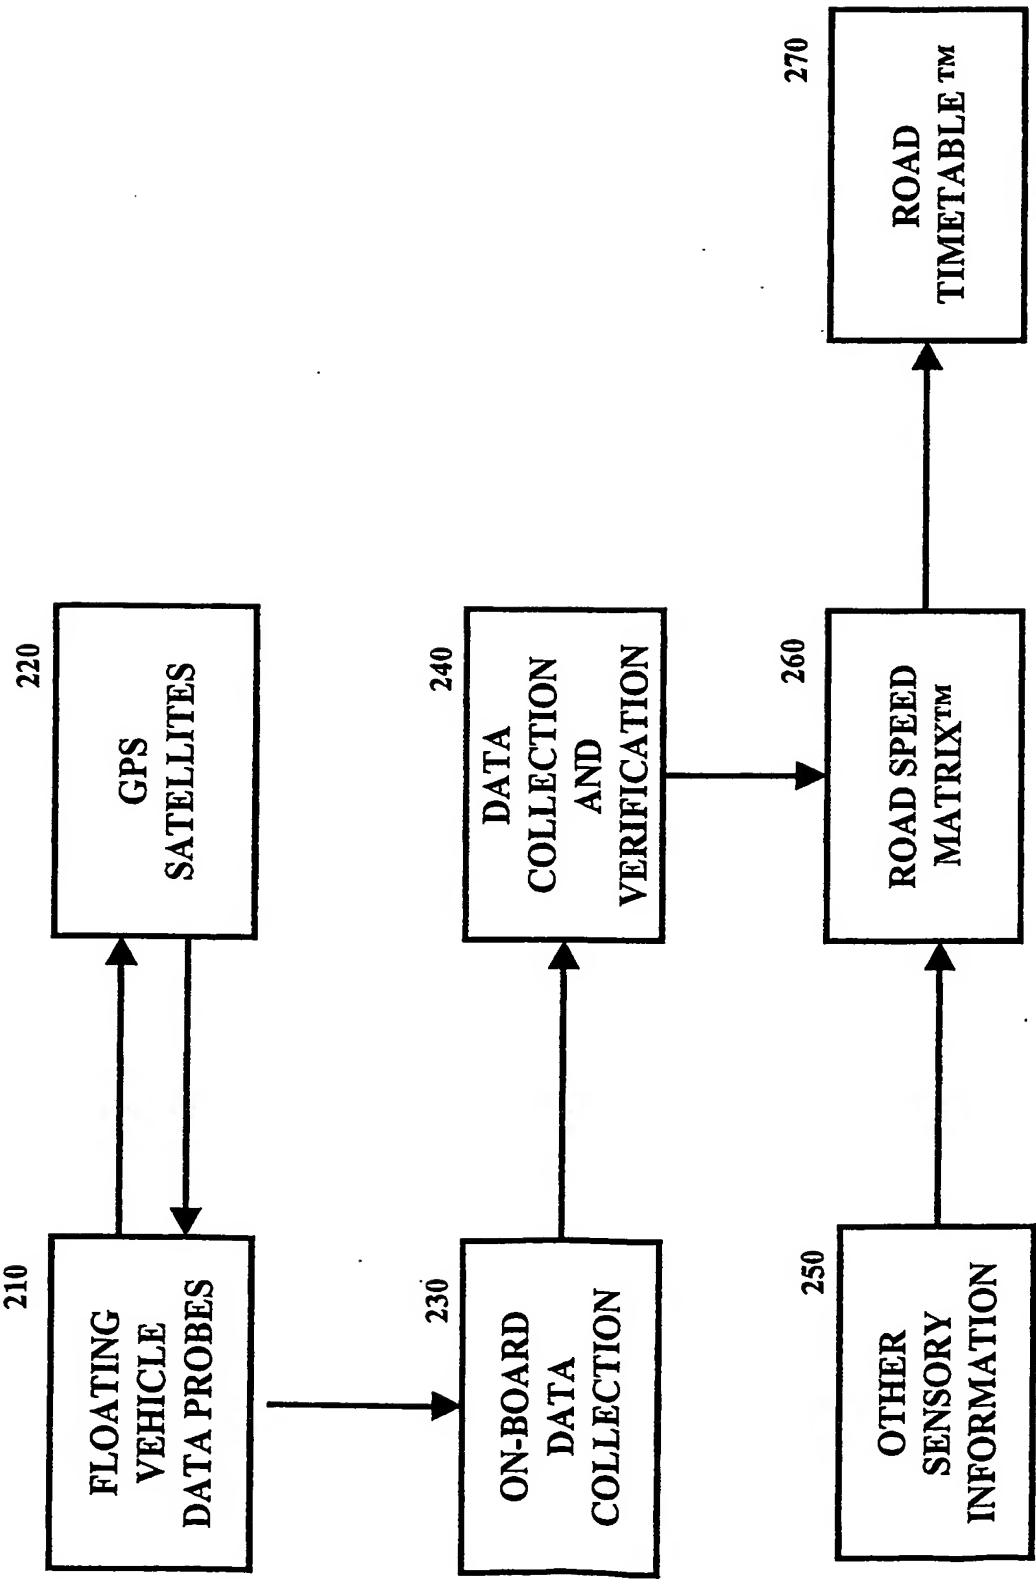


FIGURE 2

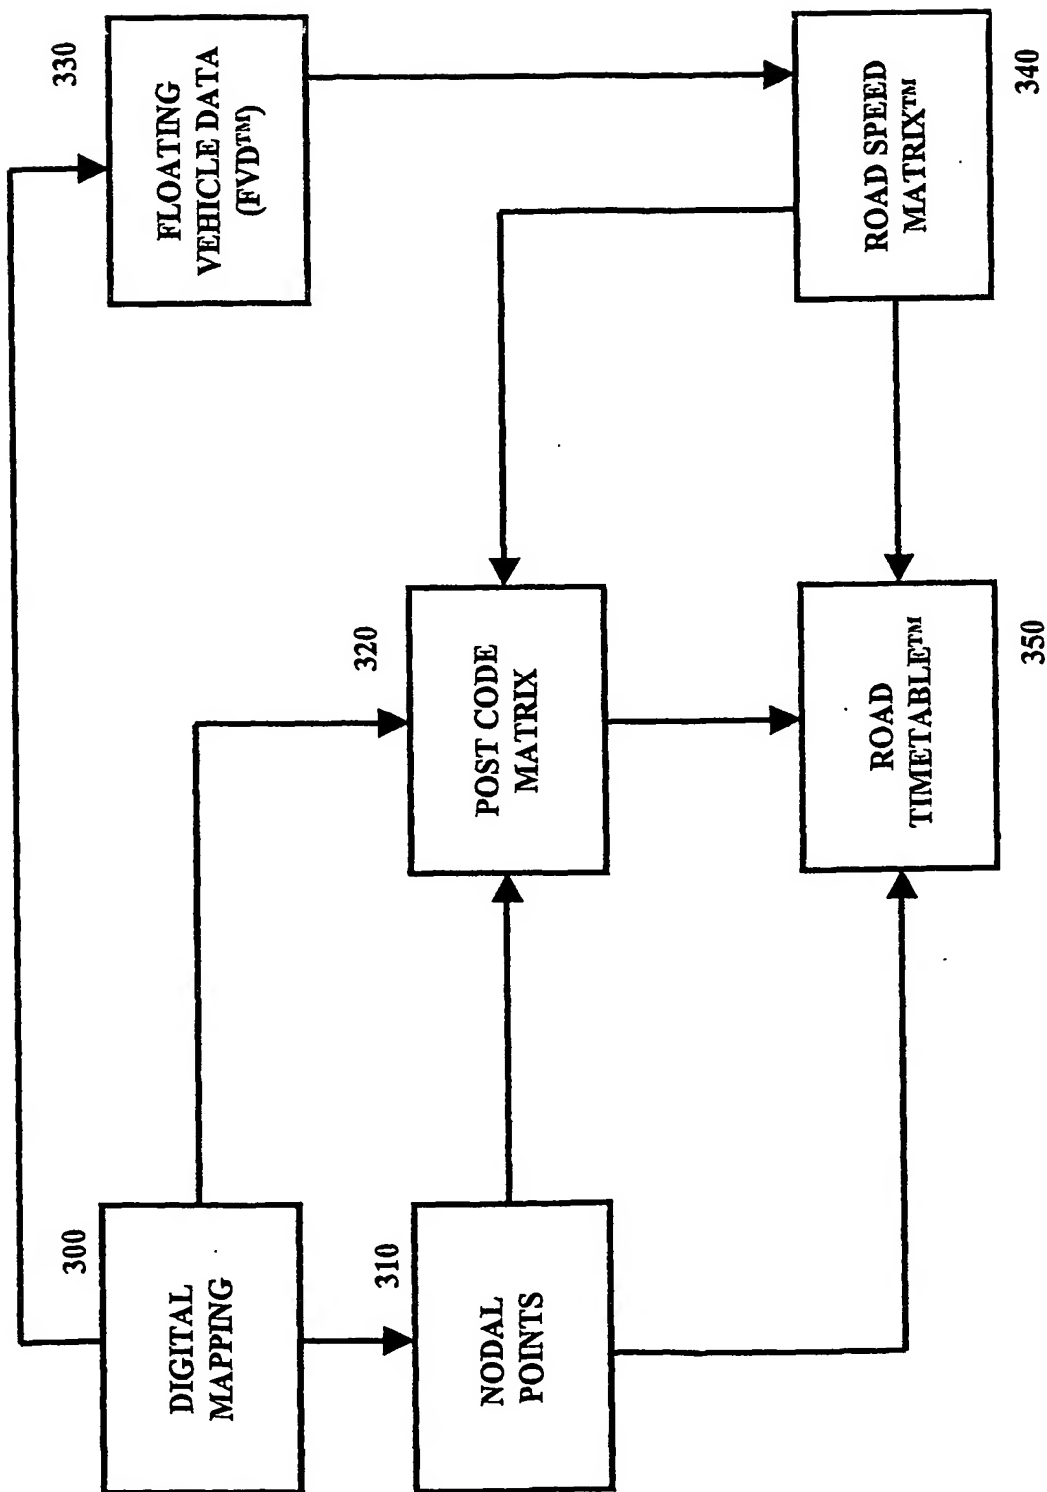


FIGURE 3

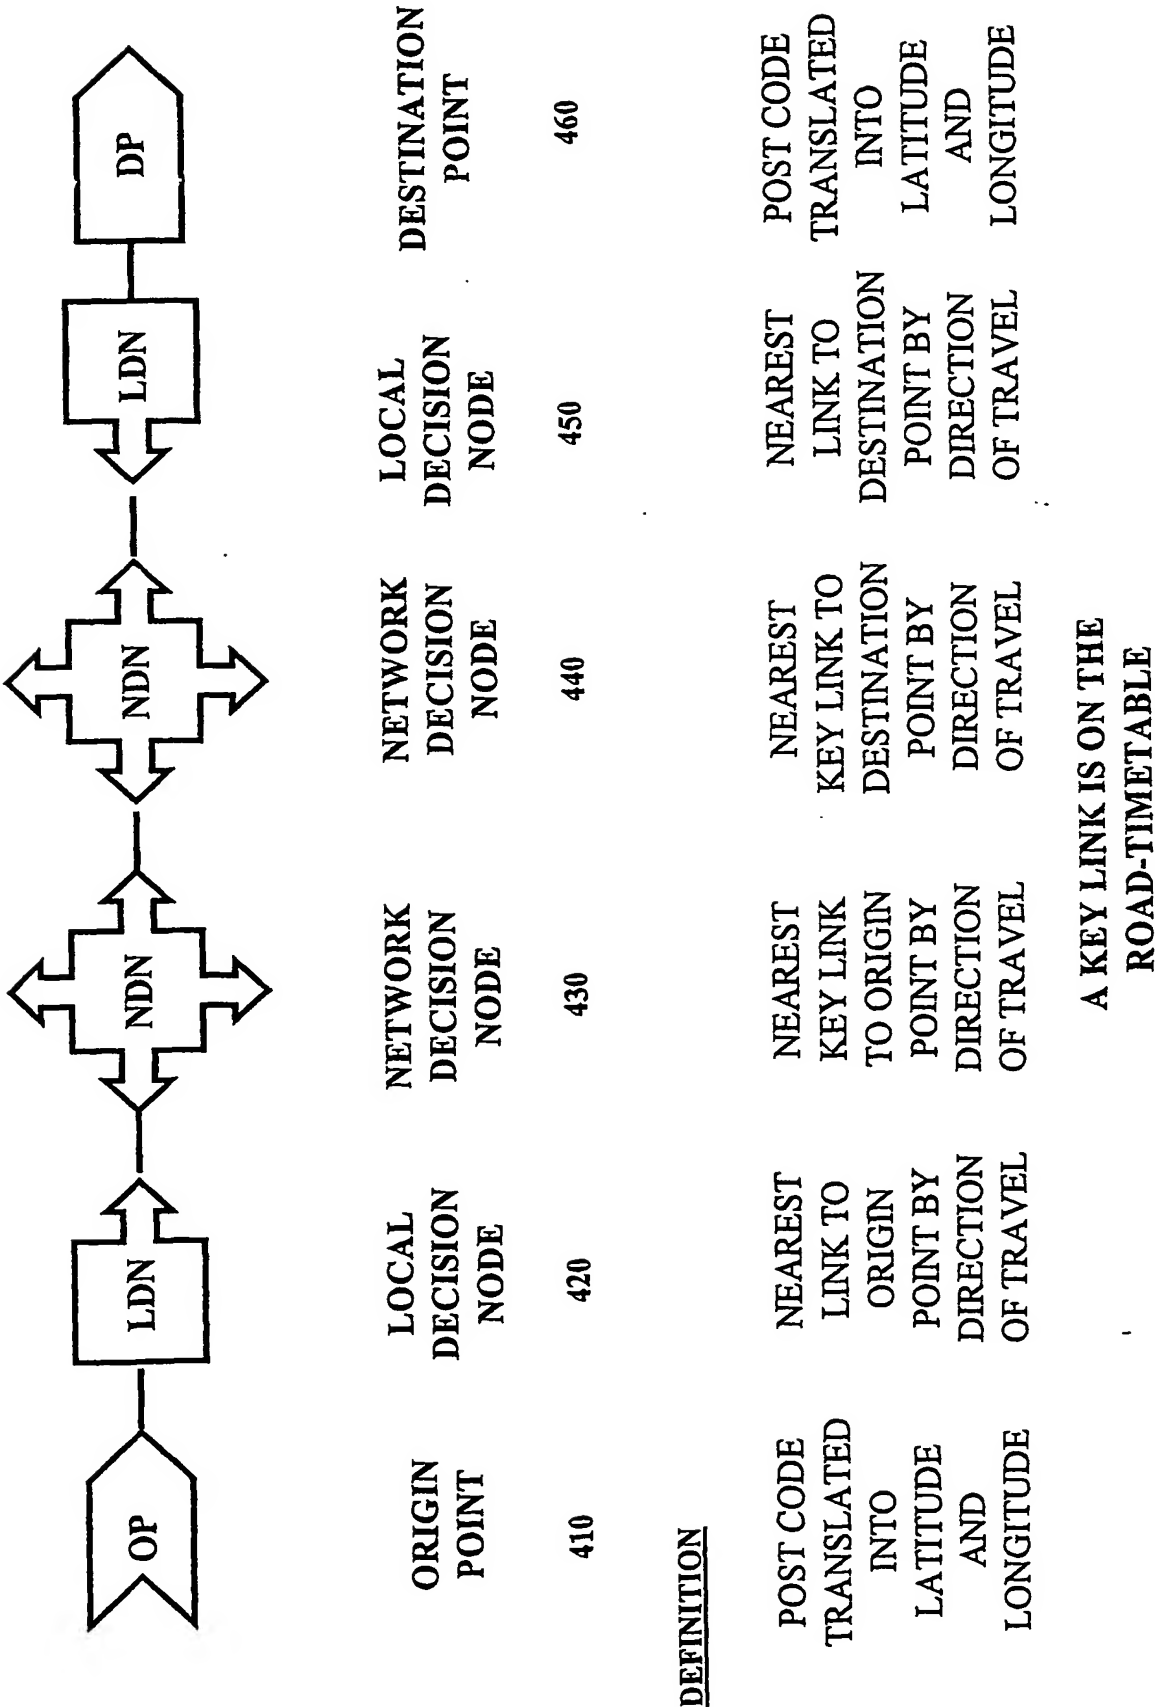


FIGURE 4

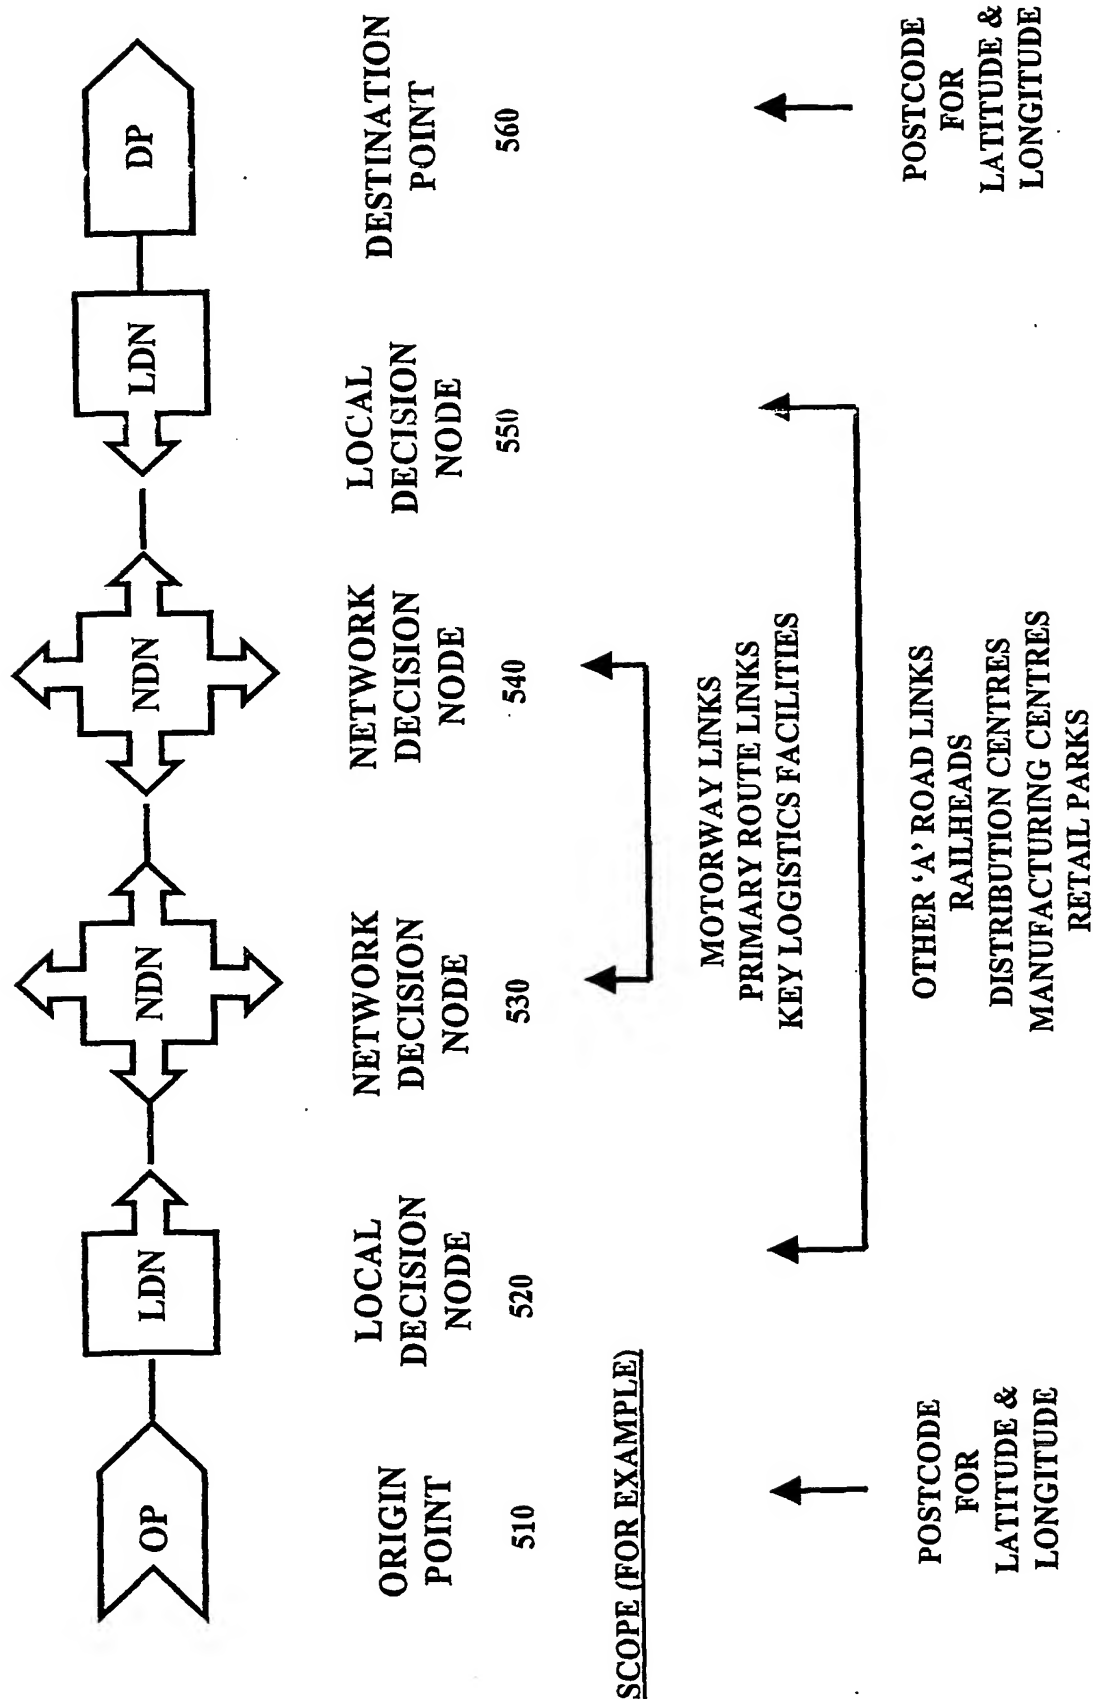


FIGURE 5

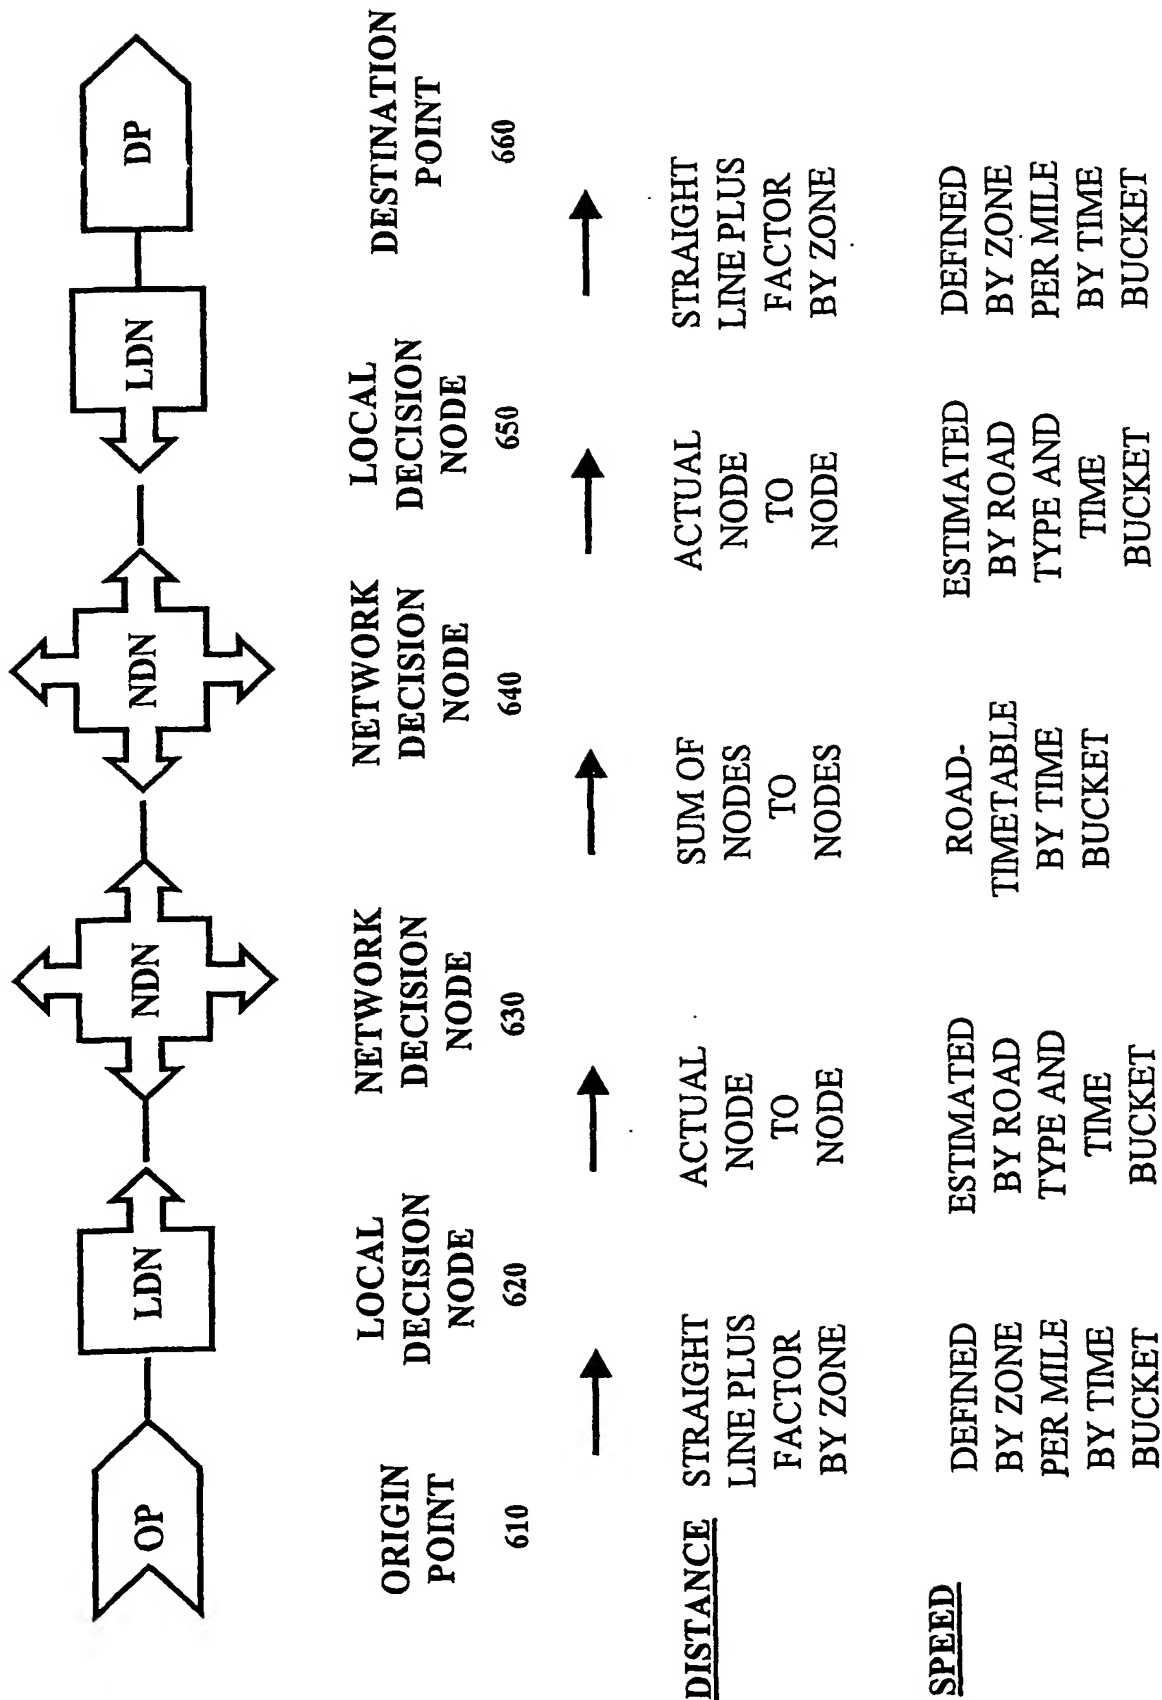


FIGURE 6

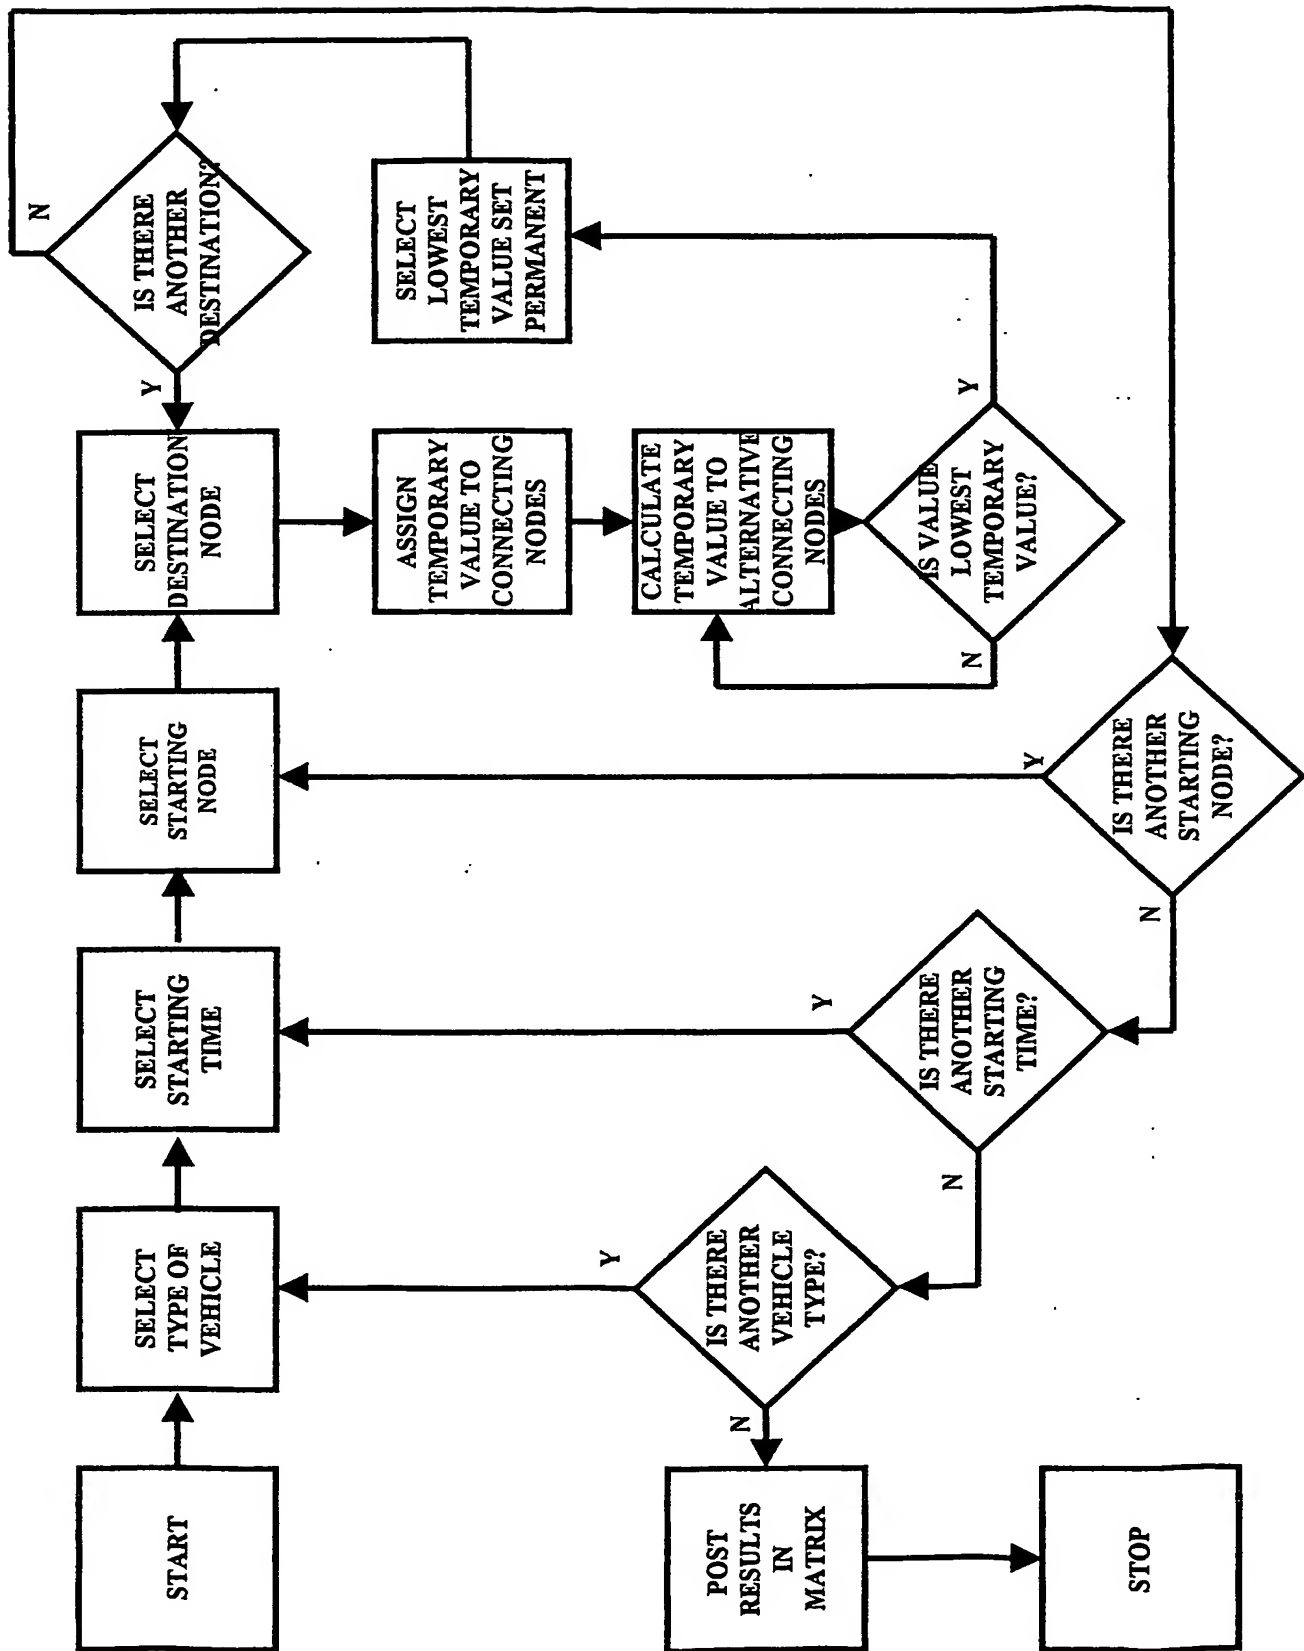


FIGURE 7A

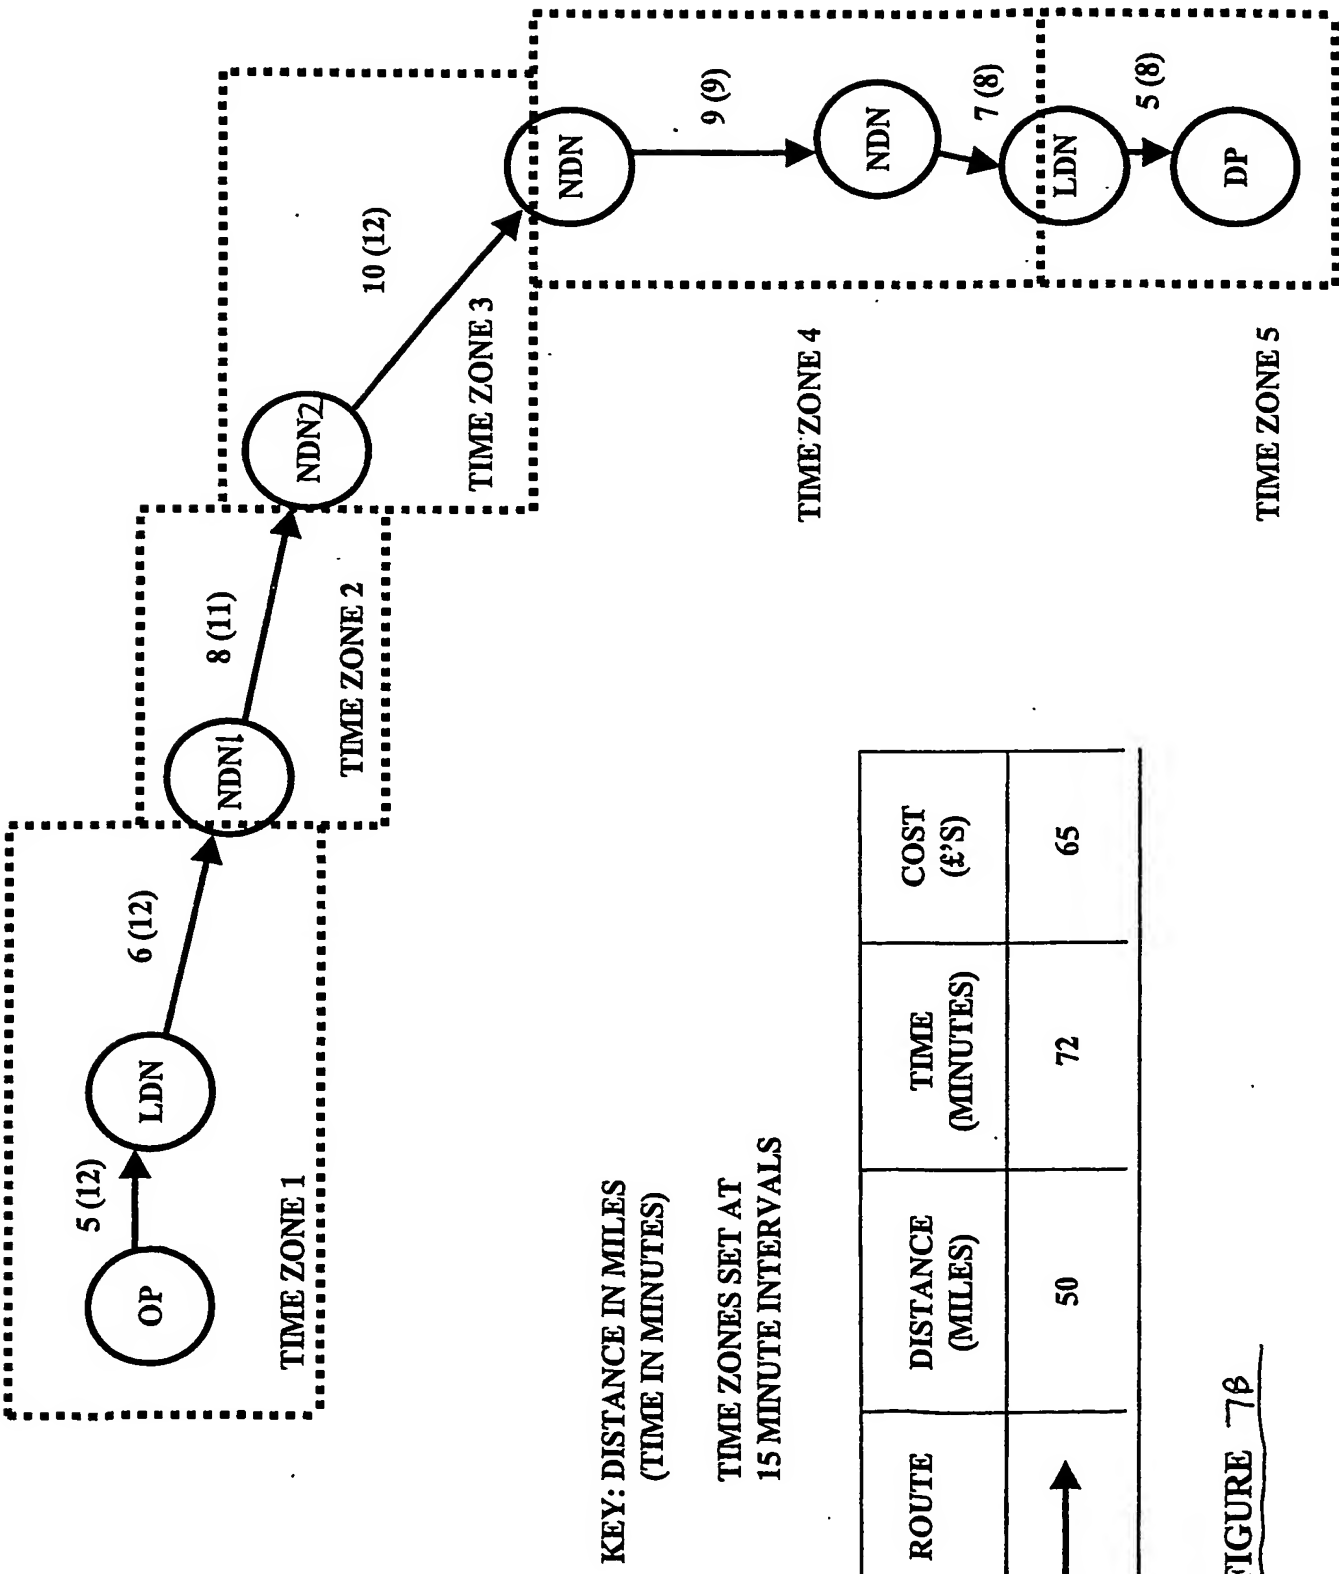


FIGURE 7b

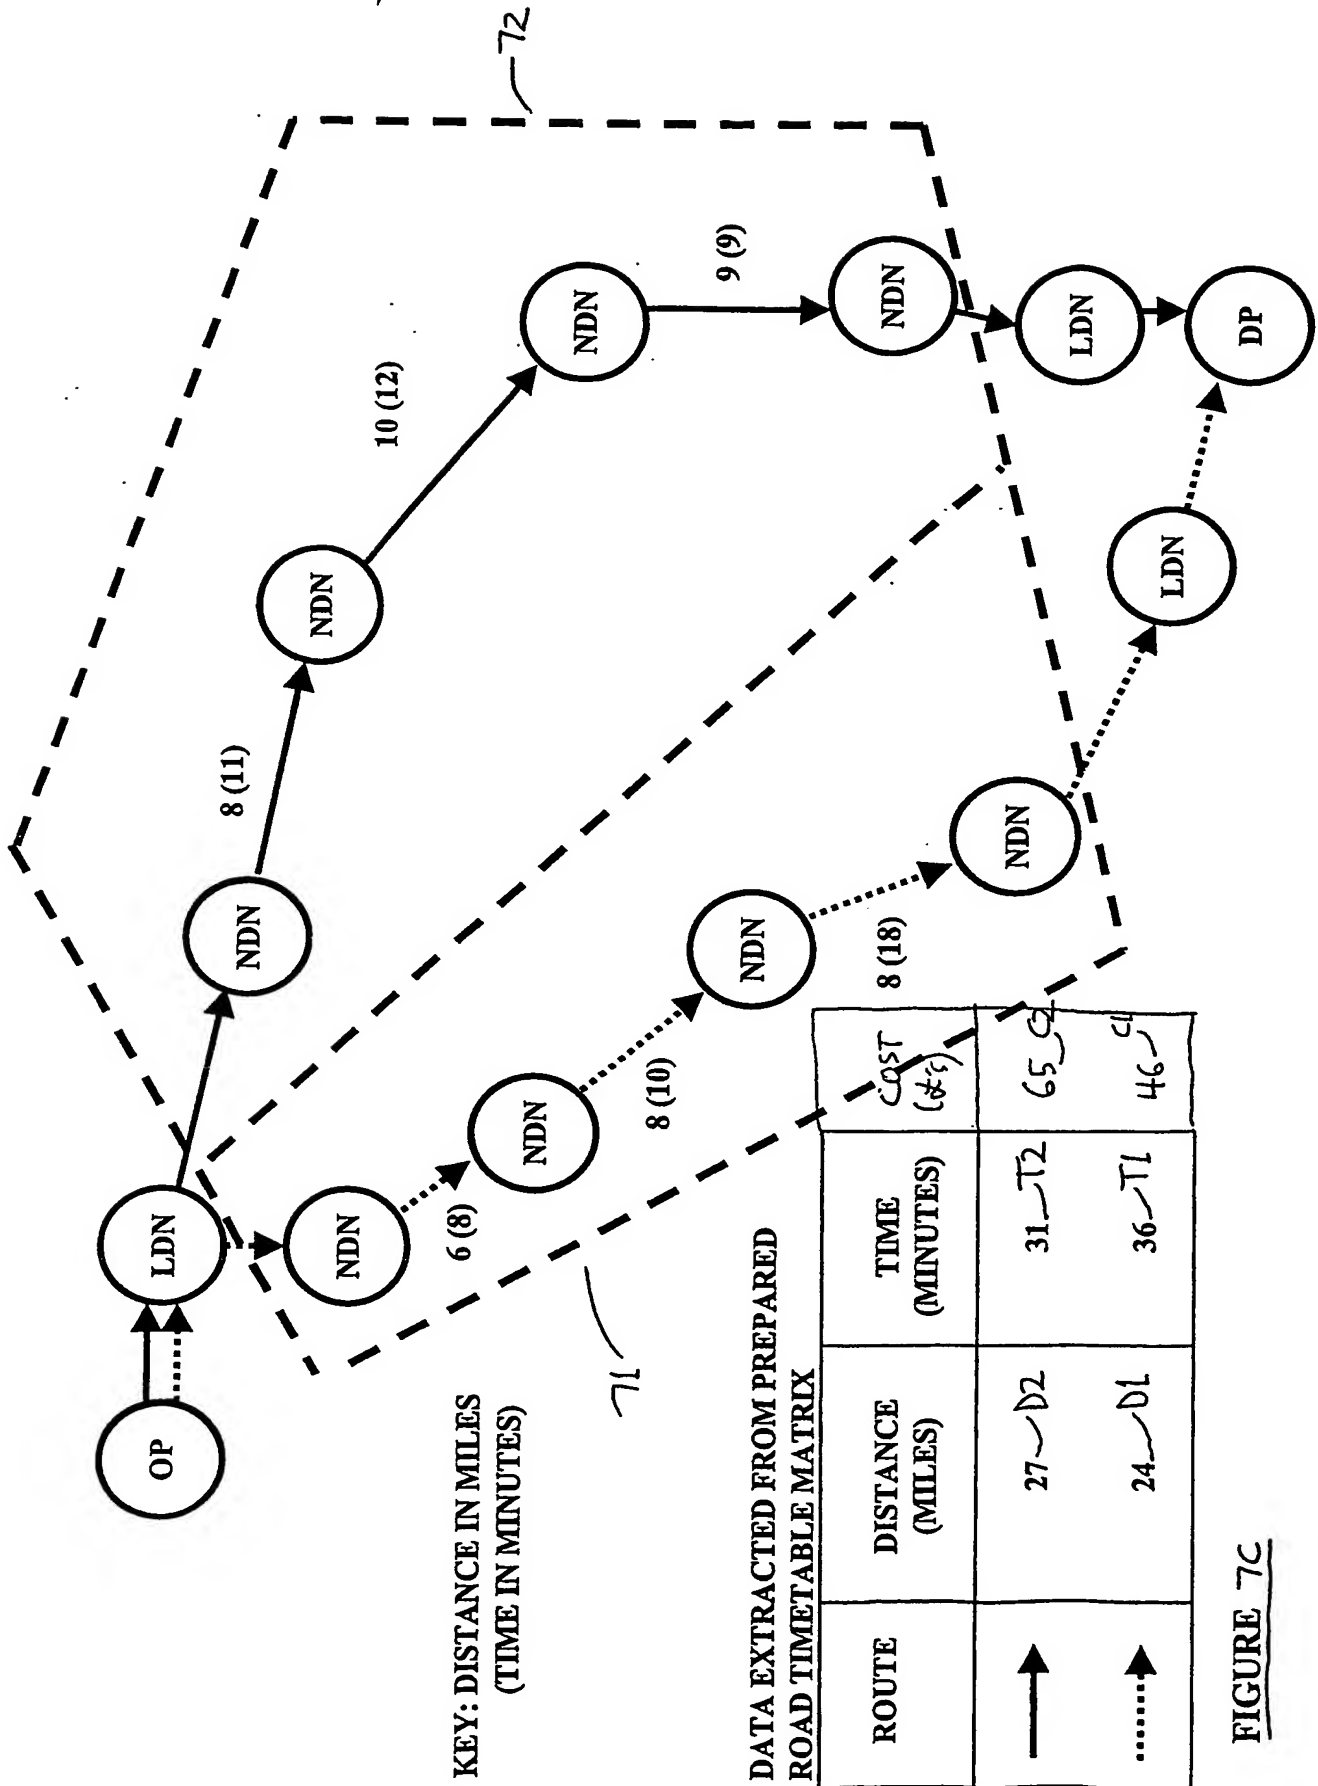
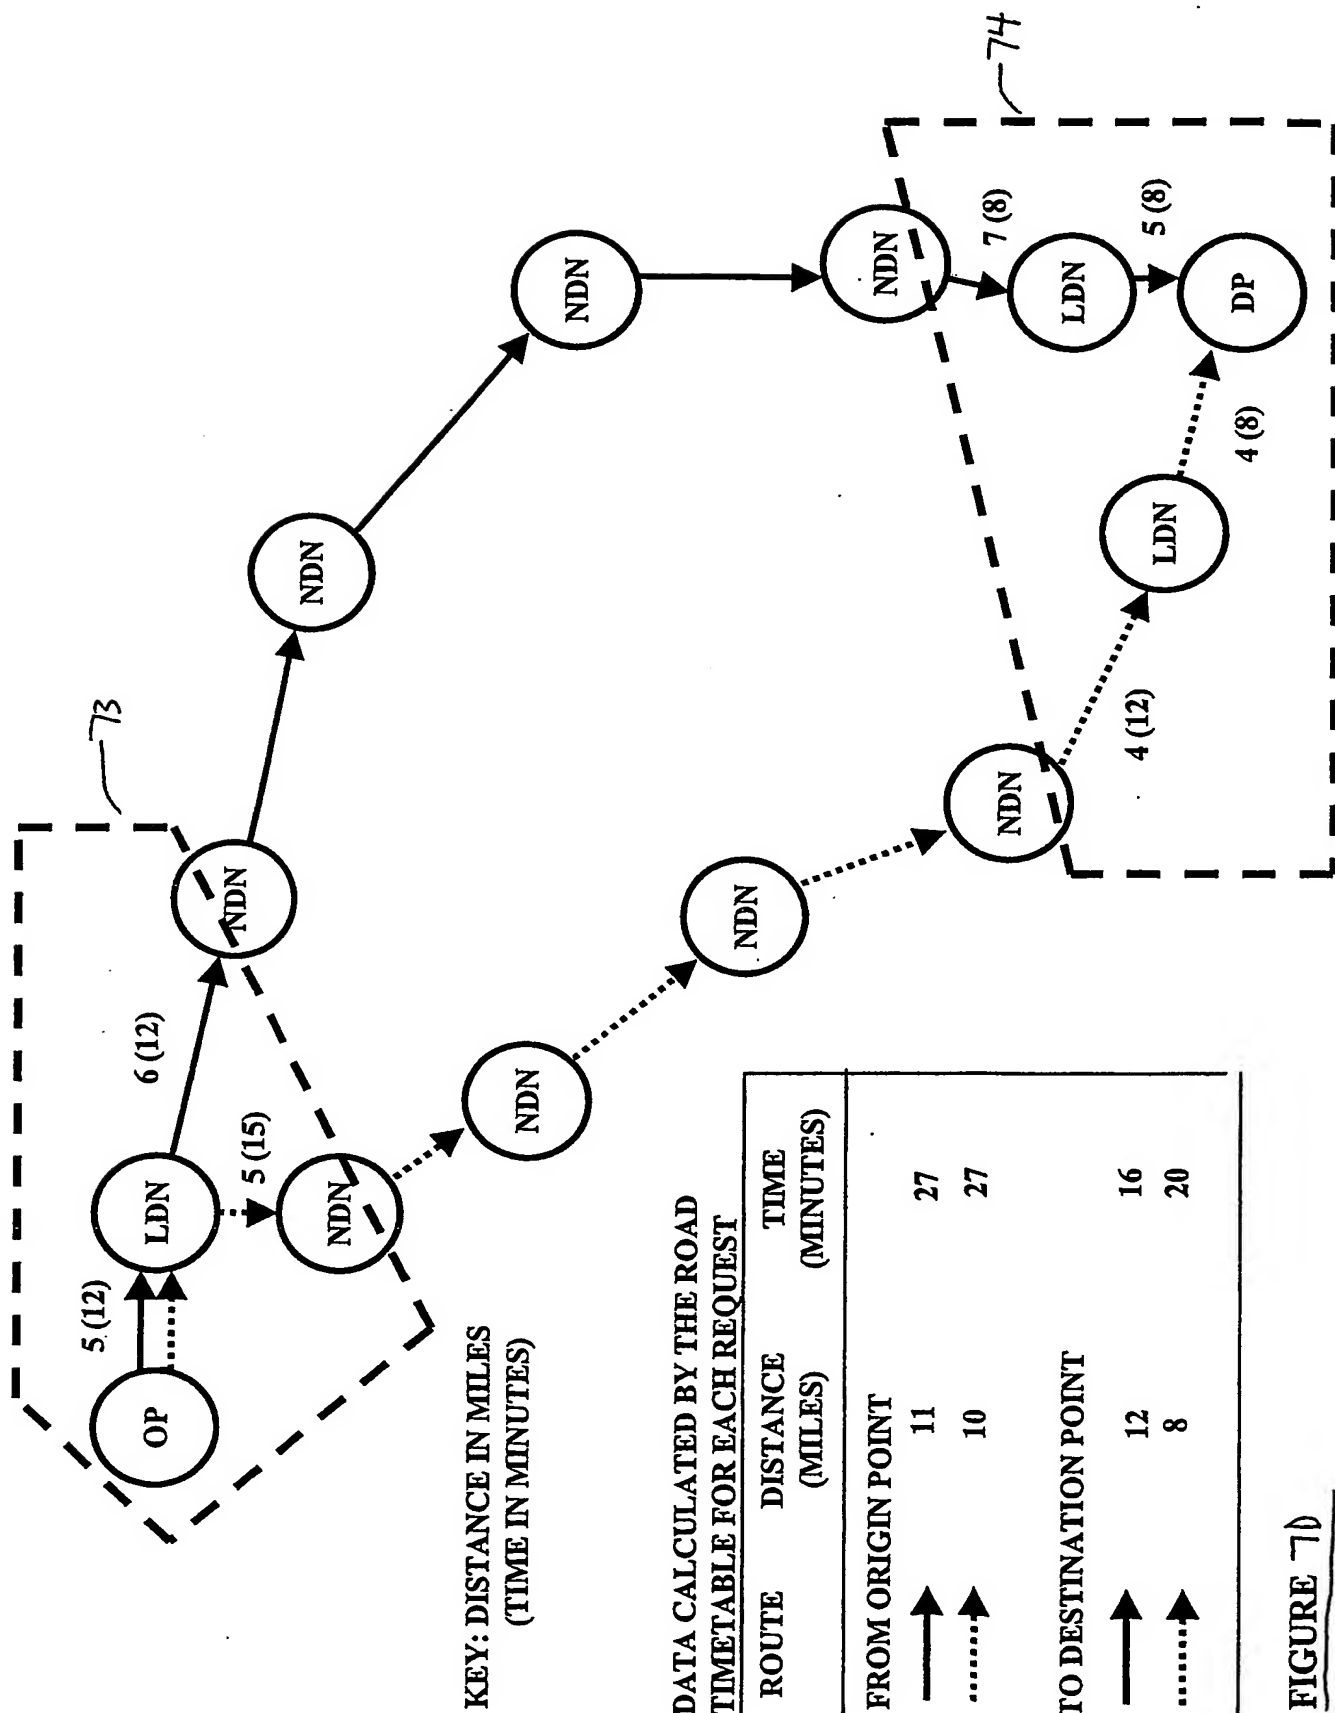


FIGURE 7C



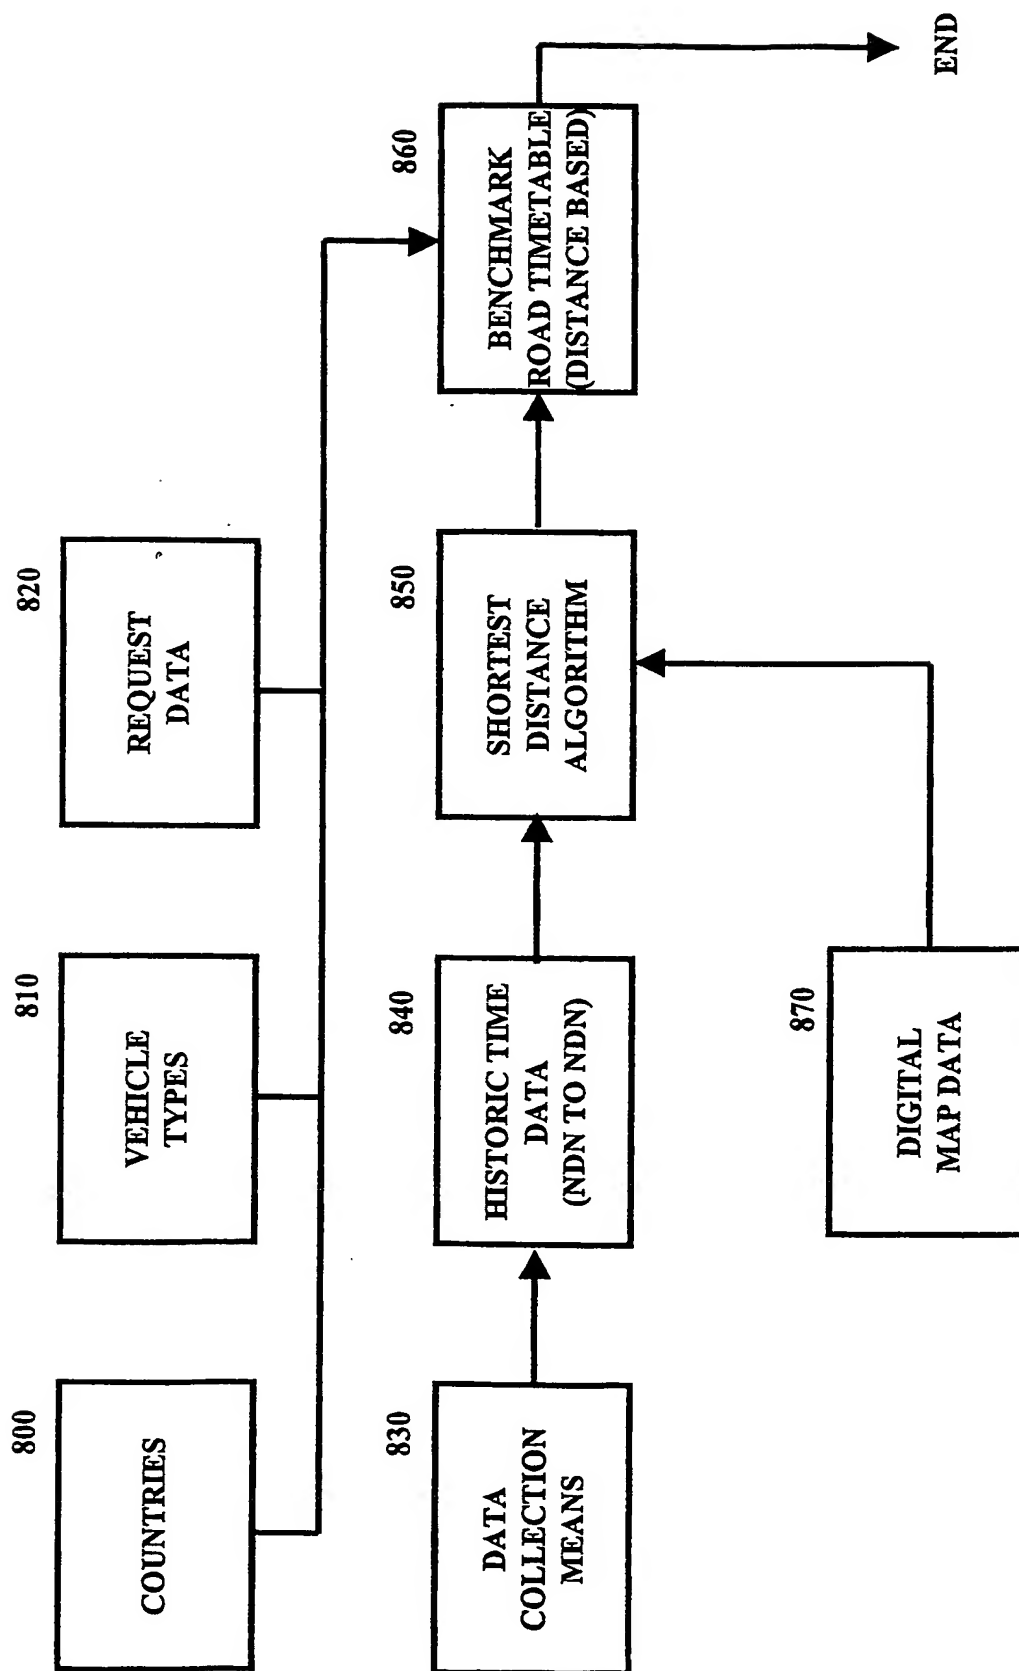


FIGURE 8

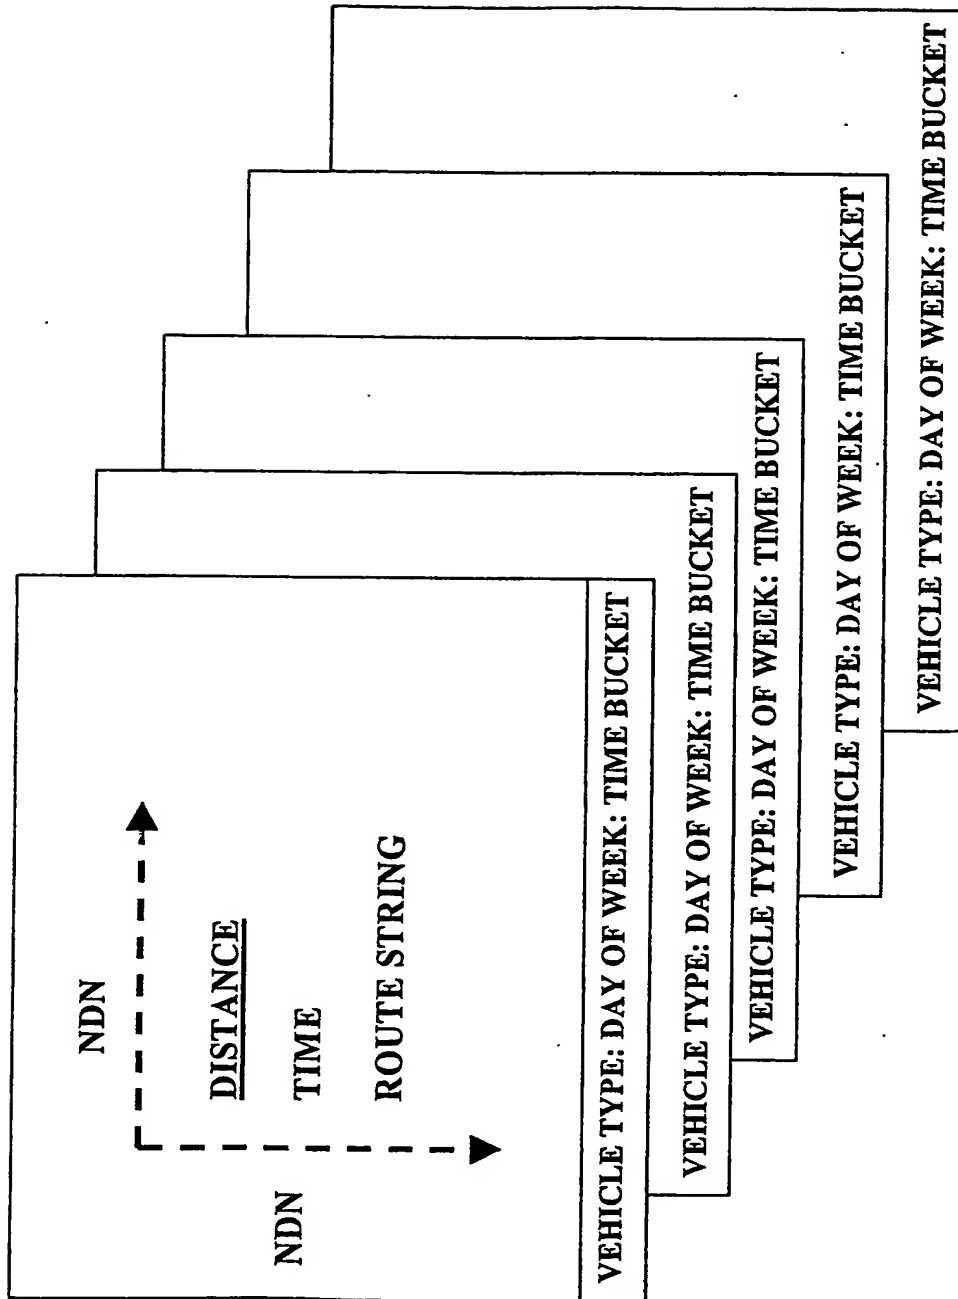


FIGURE 9

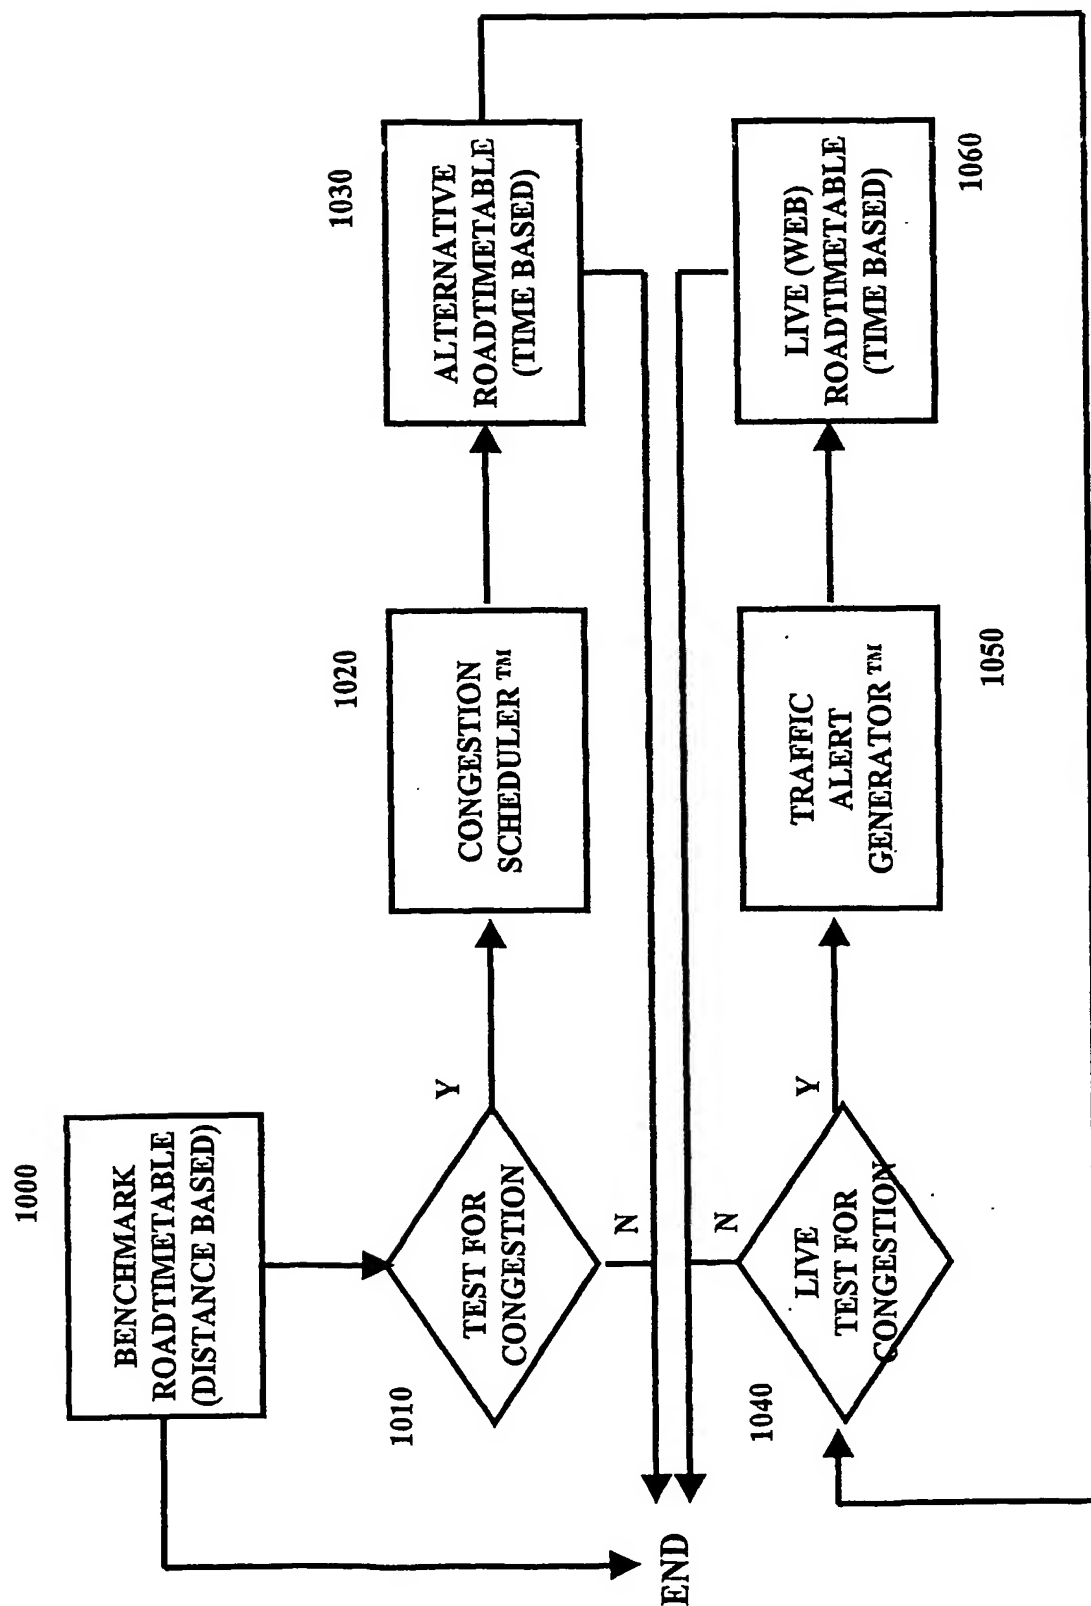


FIGURE 10

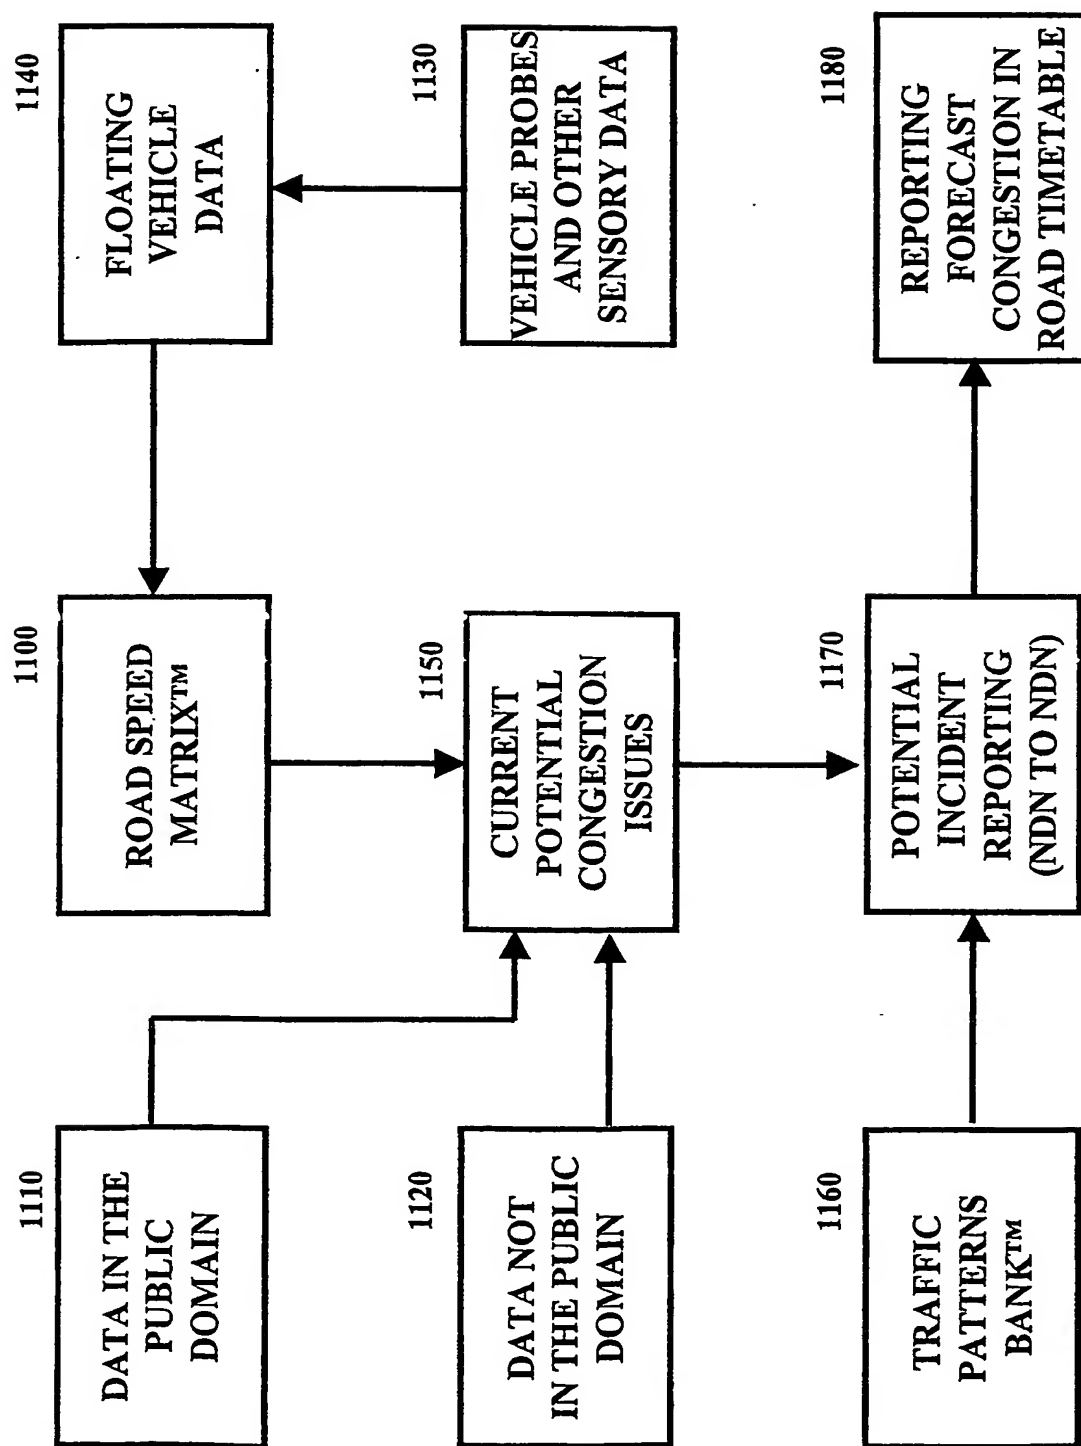


FIGURE 11

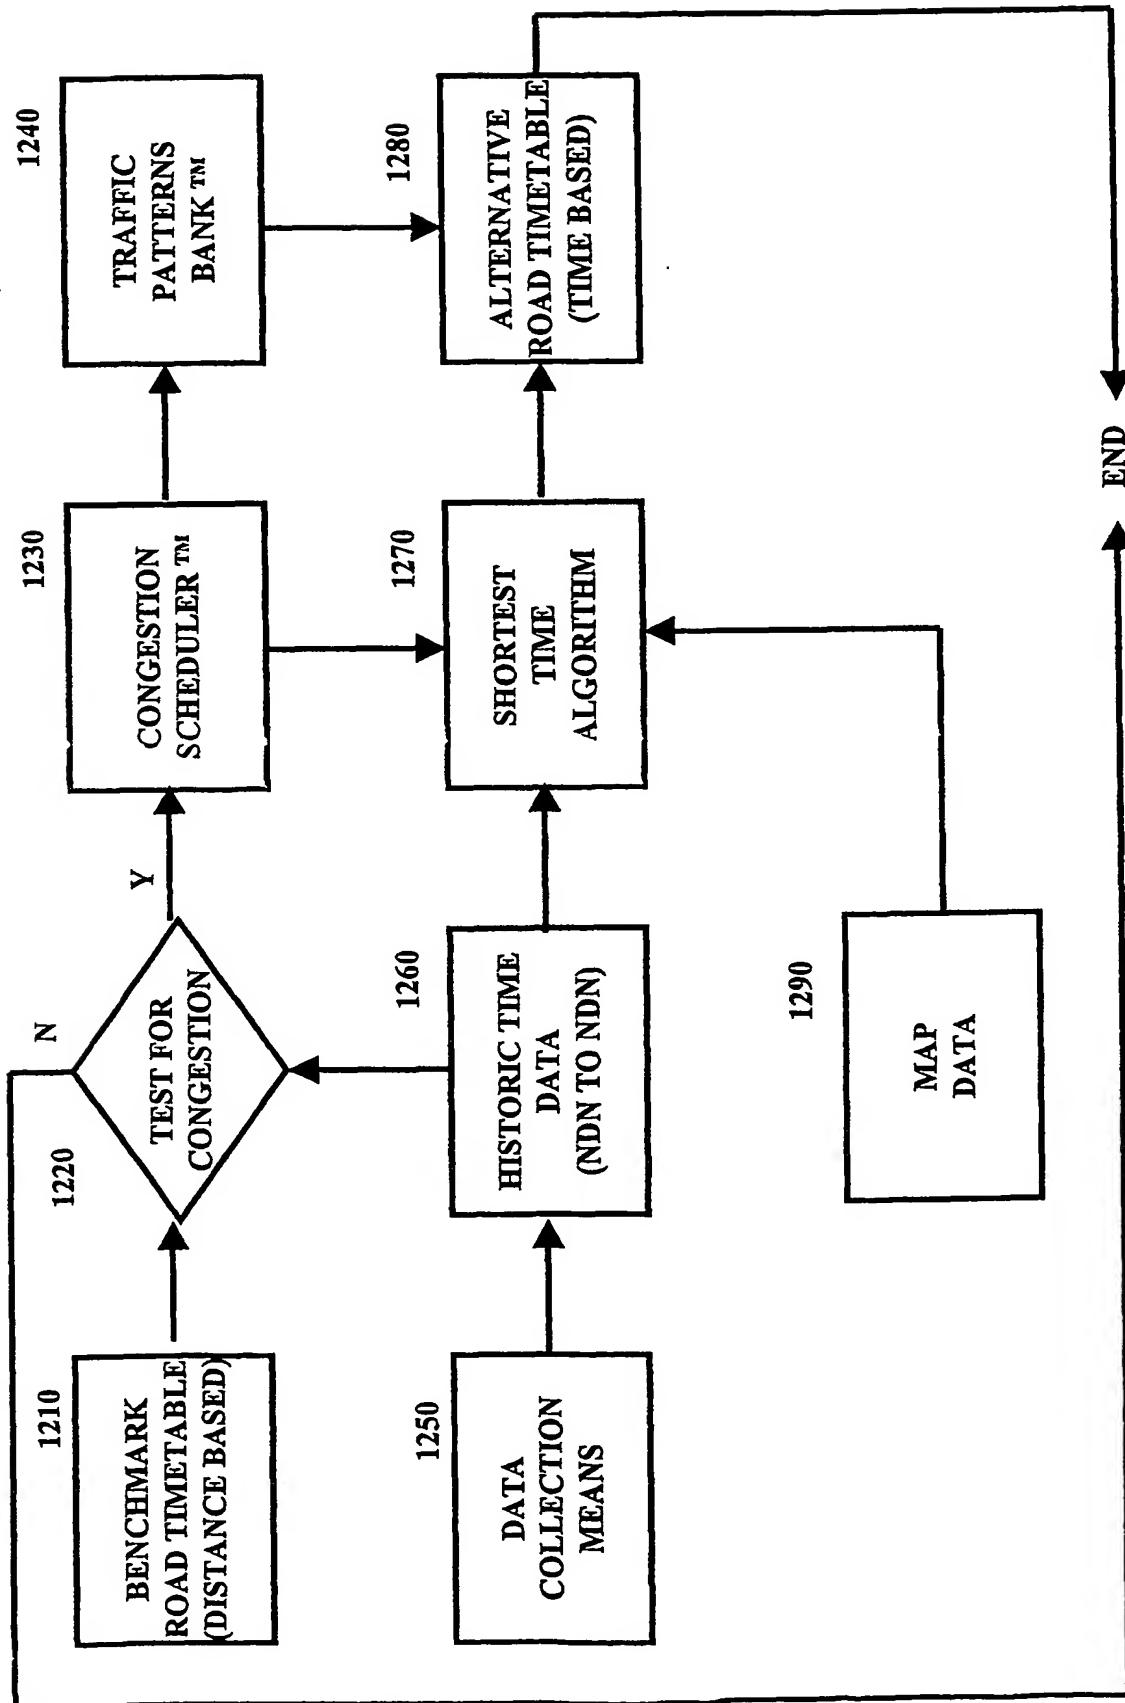


FIGURE 12

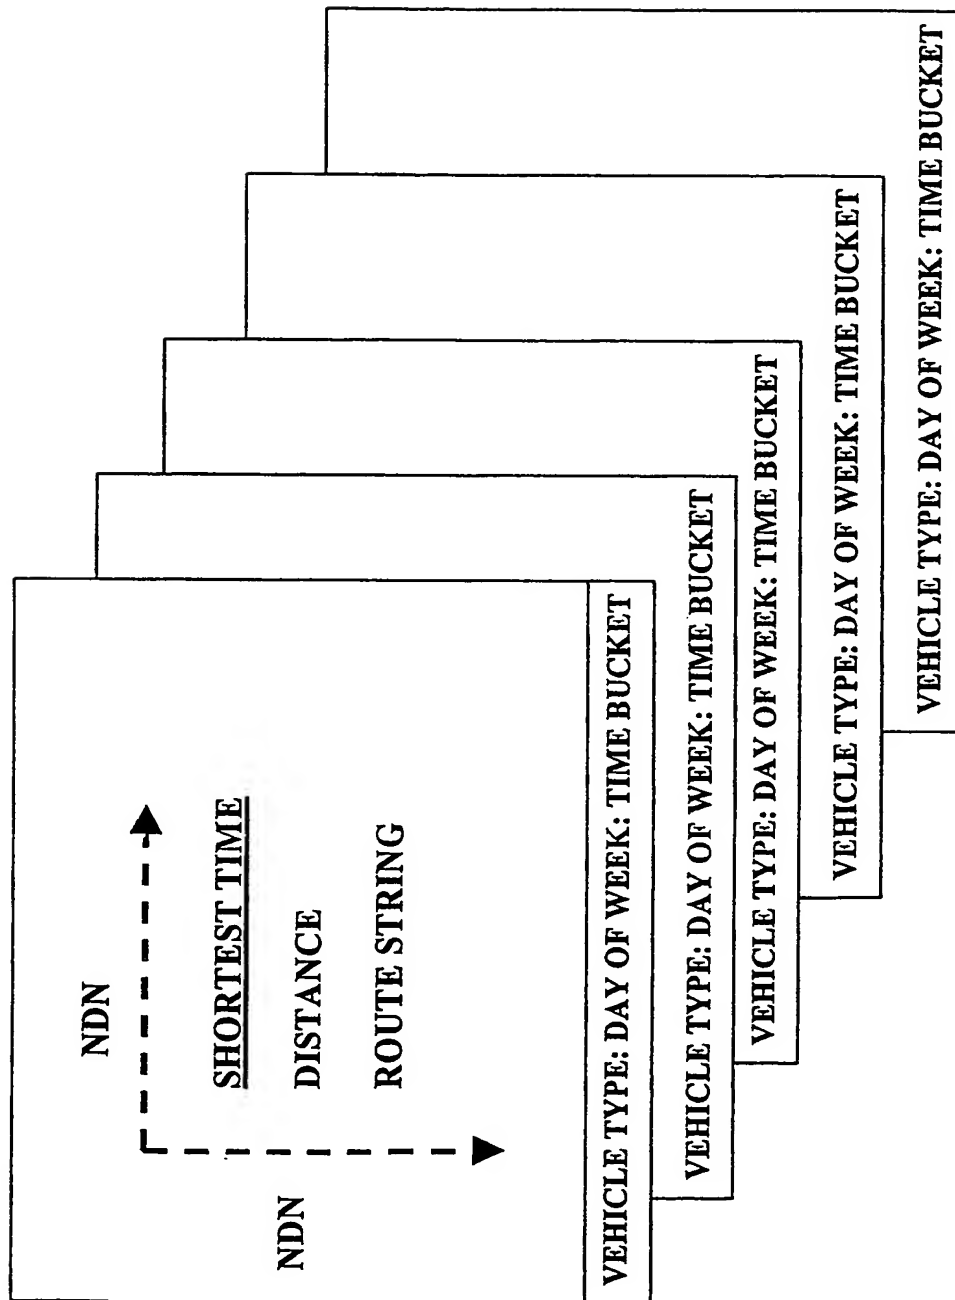


FIGURE 13

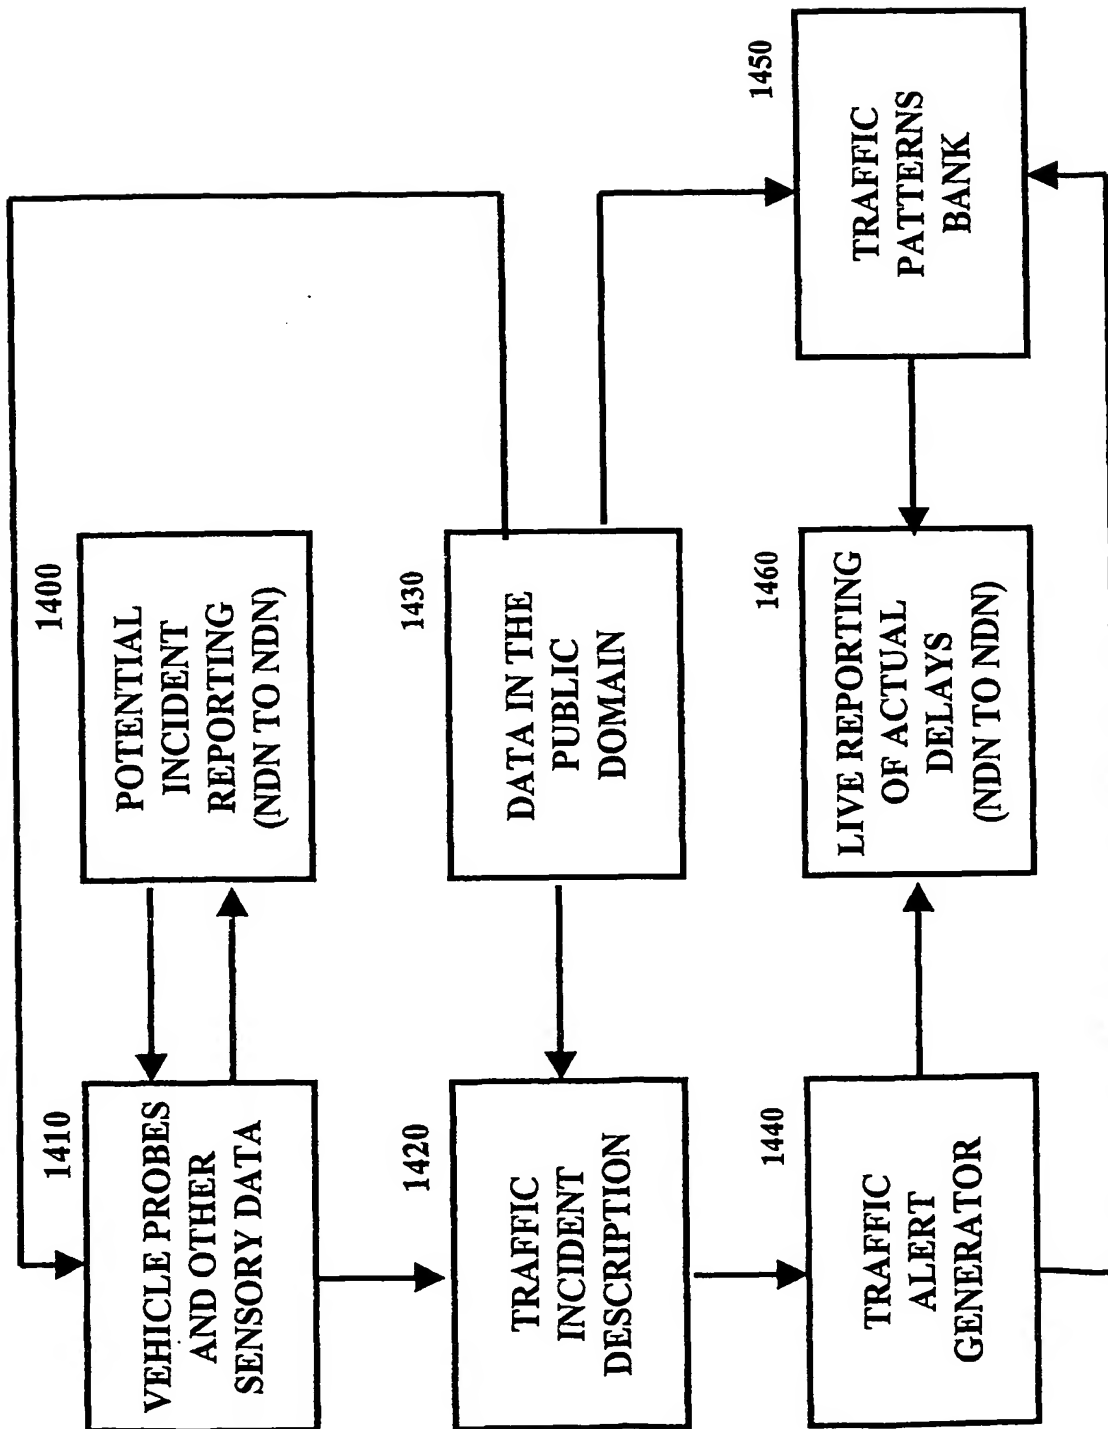


FIGURE 14

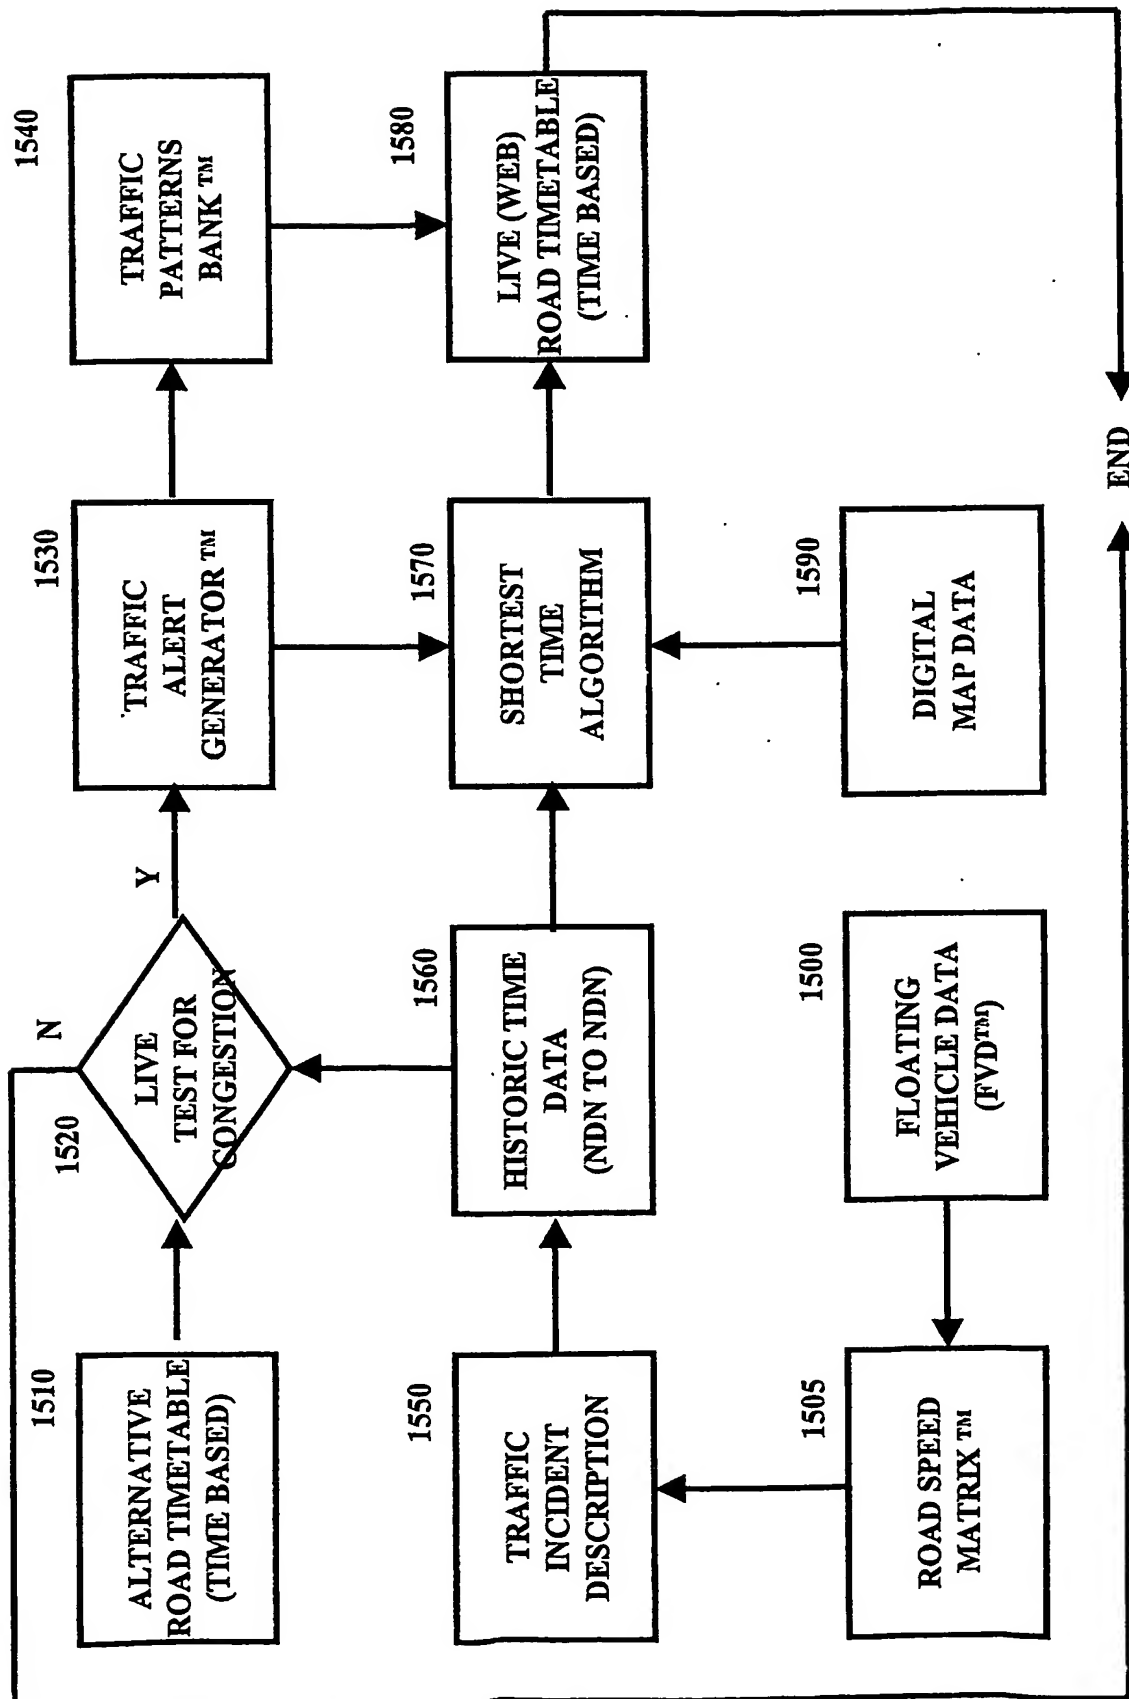


FIGURE 15

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



28 FEB 2005



(43) International Publication Date
11 March 2004 (11.03.2004)

PCT

(10) International Publication Number
WO 2004/021305 A2

- (51) International Patent Classification⁷: G08G 1/0968 (74) Agent: HILL, Justin, John; McDermott, Will & Emery, 7 Bishopsgate, London EC2N 3AR (GB).
- (21) International Application Number: PCT/GB2003/003702 (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: 27 August 2003 (27.08.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
0220062.4 29 August 2002 (29.08.2002) GB
0308188.2 9 April 2003 (09.04.2003) GB
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (71) Applicant (*for all designated States except US*): ITIS HOLDINGS PLC [GB/GB]; The Warrent House, 1 High Street, Altrincham, Cheshire WA14 1PZ (GB).
- (72) Inventors; and
- (75) Inventors/Applicants (*for US only*): BURR, Jonathan, Charles [GB/GB]; 15 Leicester Road, Hale, Altrincham, Cheshire WA15 9QA (GB). GATES, Gary [GB/GB]; 12 Dale Gardens, Heswall, Wirral CH60 6TQ (GB). SLATER, Alan, George [GB/GB]; 6 Oklands, Hillside, Heaton, Bolton BL1 5DZ (GB).
- Published:
— without international search report and to be republished upon receipt of that report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*



WO 2004/021305 A2

(54) Title: APPARATUS AND METHOD FOR PROVIDING TRAFFIC INFORMATION

(57) Abstract: A system and method for providing traffic information is disclosed. In one embodiment, a method comprises, for each segment of a route between an origin point and a destination point, performing a time-dependent journey planning calculation, based on a time during which a vehicle is predicted to be travelling through the segment, to produce a segment result; forming at least one route result, the at least one route result being formed based on a plurality of the segment results; storing the at least one route result in a digital storage means; and accessing the rapid access means for use in responding to a user request for traffic information for a journey between the origin point and the destination point. In another embodiment, a method comprises pre-determining at least a portion of a recommended most economic route between an origin point and a destination point; storing the pre-determined portion of the recommended most economic route in a rapid access means in a digital storage means; and accessing the rapid access means for use in responding to a user request for traffic information for a journey between the origin point and the destination point. In another embodiment, a method comprises determining, with reference to a first network of geographical boundaries and a second network of digital map nodes, a recommended most economic route between an origin point and a destination point; and transmitting the recommended most economic route to a user.

INTERNATIONAL SEARCH REPORT

International Application No
PCT/GB 03/03702

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G08G1/0968 G08G1/01 G08G1/123 G01C21/32

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G08G G01C G07C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 100 37 827 A (DAIMLER CHRYSLER AG) 14 February 2002 (2002-02-14) column 1, line 66 - column 2, line 10 column 3, lines 35-39 column 4, lines 44-65 column 5, lines 1-7 figure 2	1-9, 11, 12, 39-48, 50, 51, 78-80
X	DE 199 33 639 A (BOSCH GMBH ROBERT) 18 January 2001 (2001-01-18) column 2, lines 57-67 column 3, lines 31-40 ----- -/-	1-5, 39-44

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

31 March 2004

Date of mailing of the international search report

22.04.04

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Flores Jiménez, A

INTERNATIONAL SEARCH REPORT

Inter Application No
PCT/GB 03/03702

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>WO 97/40606 A (PHILIPS ELECTRONICS NV ; PHILIPS NORDEN AB (SE)) 30 October 1997 (1997-10-30)</p> <p>page 6, lines 23-25 page 7, lines 5-8 page 10, line 7 - page 11, line 27</p>	<p>13,14, 16-22, 52,53, 55-61</p>
X	<p>EP 0 838 663 A (NAVIGATION TECH CORP) 29 April 1998 (1998-04-29)</p> <p>page 2, lines 27-31 page 3, lines 1-9 page 6, line 55 - page 7, line 19 page 7, columns 52-54</p>	<p>13-15, 52-54</p>
X	<p>EP 0 372 840 A (SUMITOMO ELECTRIC INDUSTRIES) 13 June 1990 (1990-06-13)</p> <p>column 8, lines 27-35 column 9, lines 14-22 column 15, lines 22-26 column 16, lines 10-19 figure 7b</p>	<p>13,14, 16-20, 52,53, 55-59</p>
X	<p>EP 0 936 590 A (DAIMLER CHRYSLER AG) 18 August 1999 (1999-08-18)</p> <p>column 1, lines 5-6 column 2, line 41 - column 3, line 2 column 3, lines 41-45</p>	<p>1,23,25, 31,34, 40,62, 64,70,73</p>
Y		<p>24-27, 31,33, 34,36, 37, 63-66, 70,72-76</p>
Y	<p>US 5 539 645 A (MANDHYAN INDUR B ET AL) 23 July 1996 (1996-07-23)</p> <p>column 1, lines 27-35 column 2, lines 52-57 column 4, lines 17-55 column 5, lines 33-39 column 6, line 66 - column 7, line 7 column 8, lines 61-66</p>	<p>24-27, 31,33, 34,36, 37, 63-66, 70,72-76</p>

-/--

INTERNATIONAL SEARCH REPORT

Application No
PCT/GB 03/03702

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>US 5 182 555 A (SUMNER ROY L) 26 January 1993 (1993-01-26) column 3, lines 54-56 column 5, lines 18-20 column 10, lines 10-17 column 11, lines 46-52 -----</p>	32,71

INTERNATIONAL SEARCH REPORT

International application No.
PCT/GB 03/03702

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

As a result of the prior review under R. 40.2(e) PCT,
no additional fees are to be refunded.

1. ☒ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest.

- ☒ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

International Application No. PCT/ GB 03/03702

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: 1-12,39-51,78-80

Method to provide accurate route information considering the time and day of the week

2. claims: 13-22,52-61

Method of structuring map data, using transportation links and geographical indications

3. claims: 23-38,62-77

Method to provide traffic information using real time data obtained by probe vehicles (FCD)

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/GB 03/03702

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 10037827	A	14-02-2002	DE 10037827 A1	14-02-2002
DE 19933639	A	18-01-2001	DE 19933639 A1	18-01-2001
			AU 6979600 A	05-02-2001
			WO 0106213 A1	25-01-2001
WO 9740606	A	30-10-1997	DE 69714541 D1	12-09-2002
			DE 69714541 T2	24-04-2003
			EP 0835426 A2	15-04-1998
			WO 9740606 A2	30-10-1997
			JP 11508754 T	27-07-1999
			US 6061626 A	09-05-2000
EP 0838663	A	29-04-1998	US 5968109 A	19-10-1999
			AT 252720 T	15-11-2003
			CA 2219043 A1	25-04-1998
			DE 69725677 D1	27-11-2003
			EP 1365212 A1	26-11-2003
			EP 0838663 A2	29-04-1998
			JP 10312153 A	24-11-1998
			US 6308177 B1	23-10-2001
			US 5974419 A	26-10-1999
			US 5953722 A	14-09-1999
EP 0372840	A	13-06-1990	DE 68924697 D1	07-12-1995
			DE 68924697 T2	13-06-1996
			EP 0372840 A2	13-06-1990
			US 5031104 A	09-07-1991
			JP 2277200 A	13-11-1990
			JP 2716058 B2	18-02-1998
			JP 2927277 B2	28-07-1999
			JP 10104013 A	24-04-1998
EP 0936590	A	18-08-1999	DE 19805869 A1	26-08-1999
			EP 0936590 A2	18-08-1999
			JP 11328571 A	30-11-1999
US 5539645	A	23-07-1996	DE 69423096 D1	30-03-2000
			DE 69423096 T2	14-09-2000
			EP 0680648 A1	08-11-1995
			WO 9514292 A1	26-05-1995
			JP 8505974 T	25-06-1996
US 5182555	A	26-01-1993	NONE	